



GENERATOR TYPE ECO 46-2L/6








Document : **DS186A/1**
issue 001 date 14/02/2012

Electrical Characteristics										
Frequency	Hz	50				60				
Voltage (parallel star)	V	380	400	415	440	415	440	460	480	
Rated power class H	kVA	1700	1700	1700	/	/	1900	2100	2100	
	kW	1360	1360	1360	/	/	1520	1680	1680	
Rated power class F	kVA	1500	1500	1500	/	/	1700	1800	1800	
	kW	1200	1200	1200	/	/	1360	1440	1440	
Regulation with	DSR	±1% with any power factor and speed variations between -5% +30%								
Insulation class		H								
Execution		Brushless								
Stator winding		12 ends								
Rotor		with damping cage								
Efficiencies class H	4/4	%	97,2	97,1	96,9	/	/	97,6	97,8	97,7
(see graph. for details)	3/4	%	97,6	97,3	97,4	/	/	97,8	98,2	97,9
	2/4	%	96,6	96,5	96,5	/	/	96,9	97,1	97
	1/4	%	95,2	95,5	95,3	/	/	95,8	95,8	95,8
Reactances (f. l.cl. F)	Xd	%	227,1	205	190,4	/	/	230,4	223,2	205
	Xd'	%	16,8	15,2	14,1	/	/	17,08	16,6	15,2
	Xd''	%	11,2	10,1	9,4	/	/	11,35	11,0	10,1
	Xq	%	124,1	112	104,0	/	/	125,9	122,0	112
	Xq'	%	124,1	112	104,0	/	/	125,9	122,0	112
	Xq''	%	24,4	22,0	20	/	/	24,7	24,0	22,0
	X ₂	%	17,7	16,0	14,9	/	/	17,98	17,4	16,0
	X ₀	%	2,3	2,1	2	/	/	2,36	2,3	2,1
Short Circuit Ratio	Kcc		0,44	0,49	0,53	/	/	0,43	0,45	0,49
Time Constants	Td'	sec.	0,160							
	Td''	sec.	0,13							
	Tdo'	sec.	2,9							
	Tα	sec.	0,019							
Short Circuit Current Capacity		%	>300				>300			
Excitation at no load	Amp.		0,9	1	1,1	/	/	0,85	0,9	0,95
Excitation at full load	Amp.		3,3	3,5	3,7	/	/	2,9	3,1	3,3
Overload (long-term)		%	1 hour in a 6 hours period 110% rated load							
Overload per 20 sec.		%	300							
Stator Winding Resistance (20 °C)	Ω		0,0041							
Rotor Winding Resistance (20 °C)	Ω		5,78							
Exciter Resistance (20 °C)	Ω		Rotor : 0,17				Stator : 16,90			
Heat dissipation at f.l.cl.H	W		39.177	40.618	43.509	/	/	37.377	37.791	39.550
Telephone Interference			THF < 2%				TIF < 40			
Radio interference			EN61000-6-3, EN61000-6-1. For others standards apply to factory							
Waveform Distors.(THD) at f. load	LL/LN %		3,4 / 3,1							
Waveform Distors.(THD) at no load	LL/LN %		1 / 0,96							
Mechanical characteristics										
Protection			IP 21 (other protection on request)							
DE bearing			6330							
NDE bearing			6324							
Weight of wound stator assembly	kg		1580							
Weight of wound rotor assembly	kg		1460							
Weight of complete generator	kg		4415							
Maximun overspeed	rpm		1500							
Unbalanced magnetic pull at f.l.cl.F	kN/mm		5,9							
Cooling air requirement	m ³ /min		95				120			
Inertia Constant (H)	sec.		0,21				0,25			
Noise level at 1m/7m	dB(A)		91 / 82				93 / 84			

All technical data are to be considered as a reference and they can be modified without any notice.








This document is a propriety of Mecc Alte S.p.A.. All rights reserved.

50 Hz

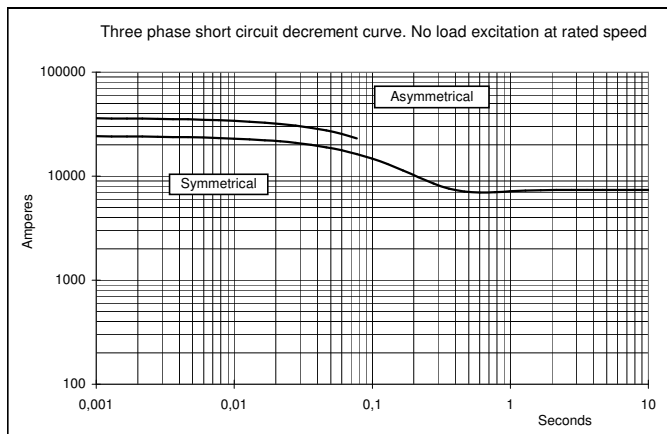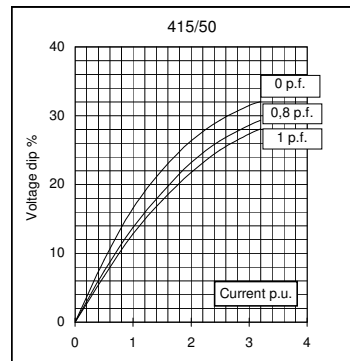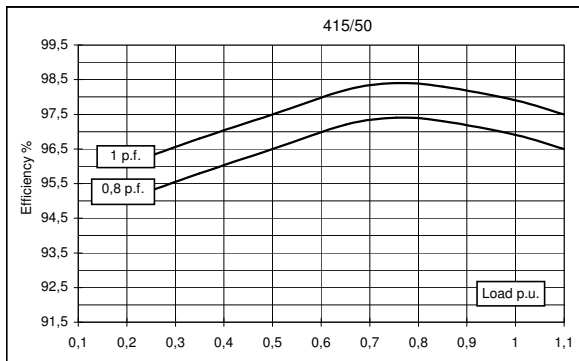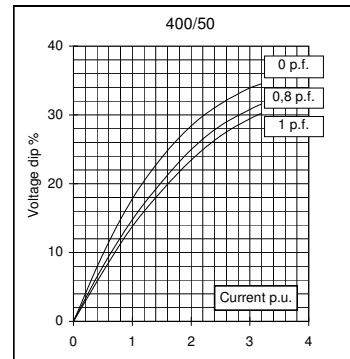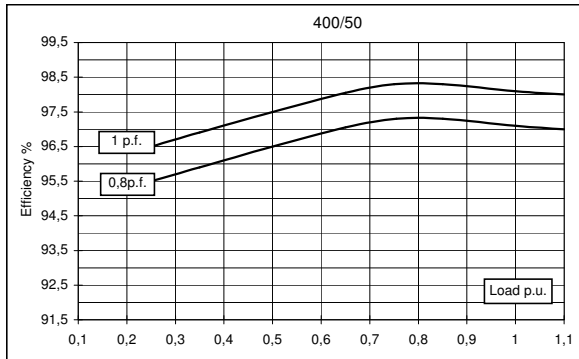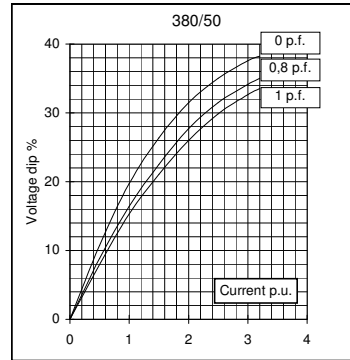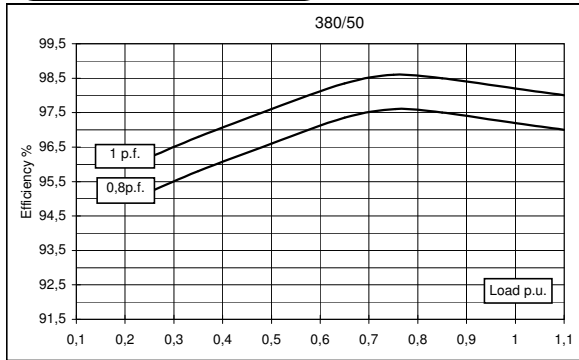




60 Hz

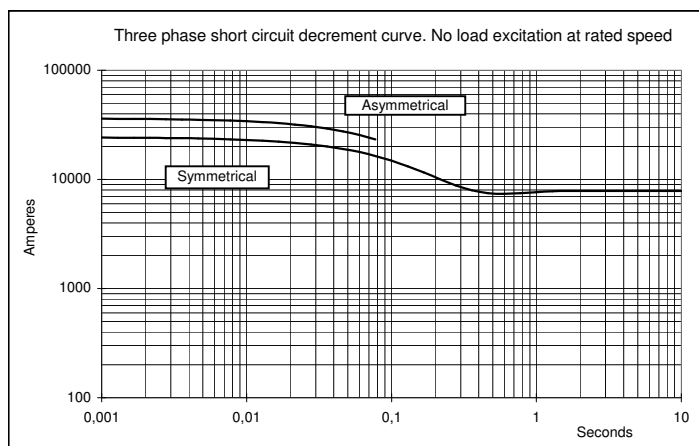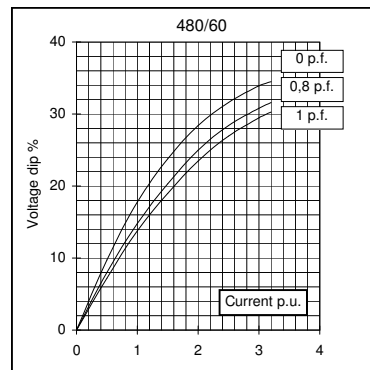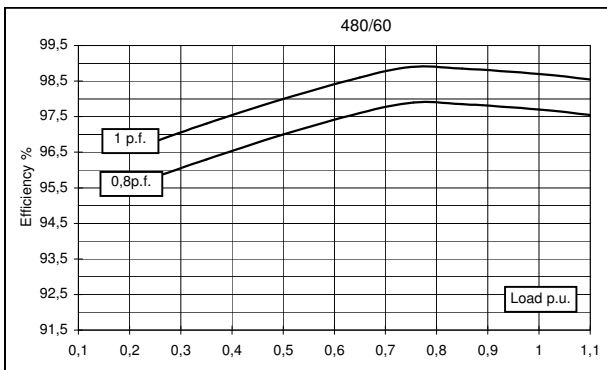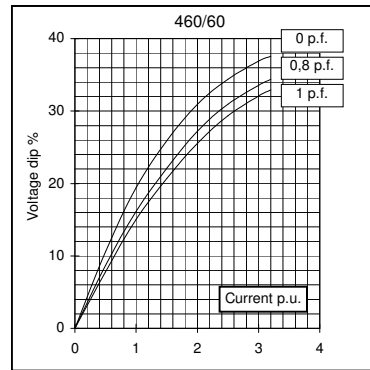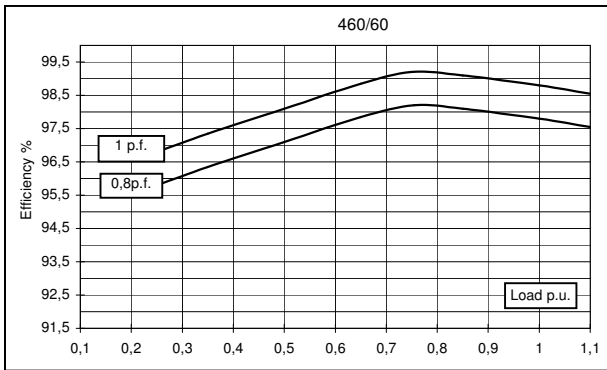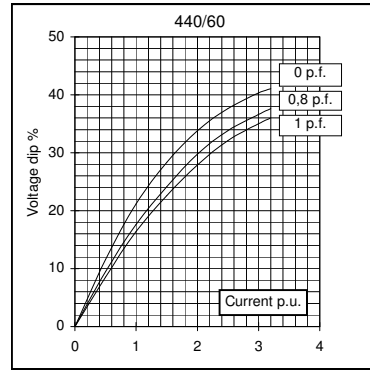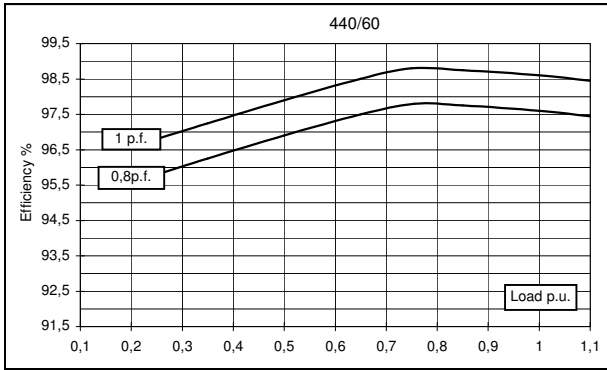


TWO BEARING MOMENTS OF INERTIA

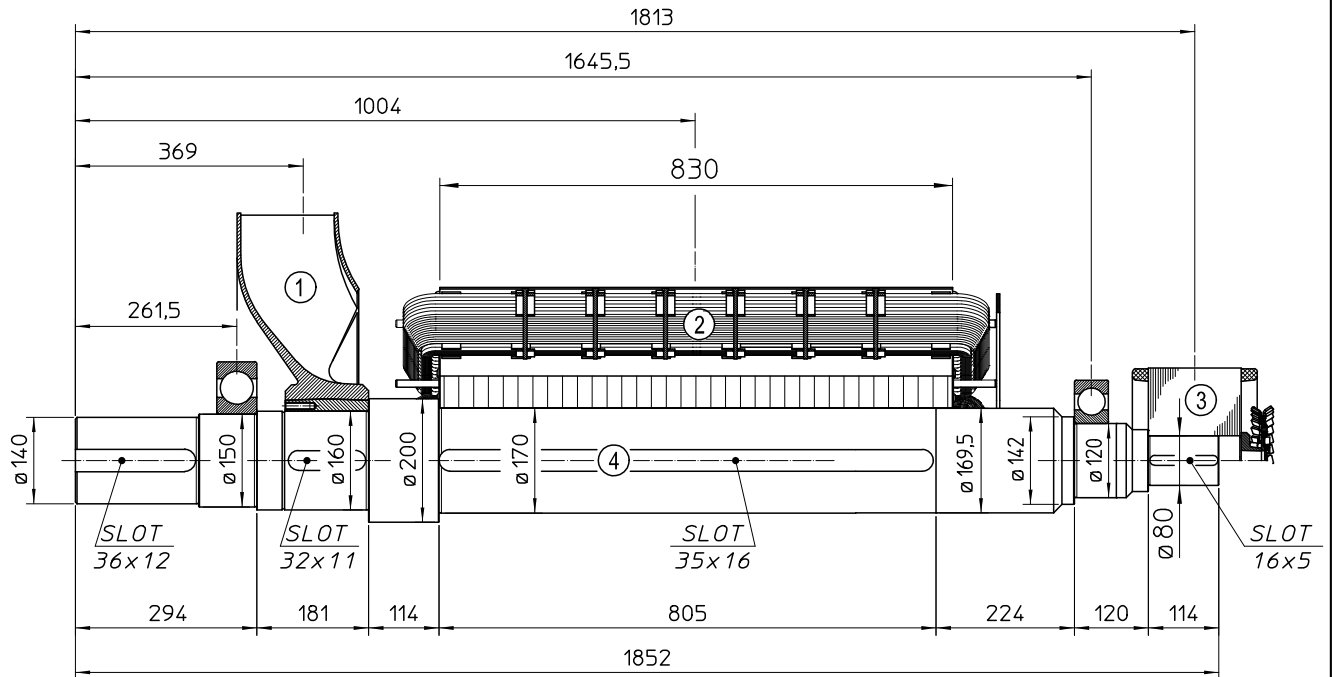


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	42.7	2.250
2	MAIN ROTOR	1460	61.265
3	EX. ROTOR	74.7	0.909
4	SHAFT	288	0.985
TOTAL		1865.4	65.409

TWO BEARING DIMENSIONS

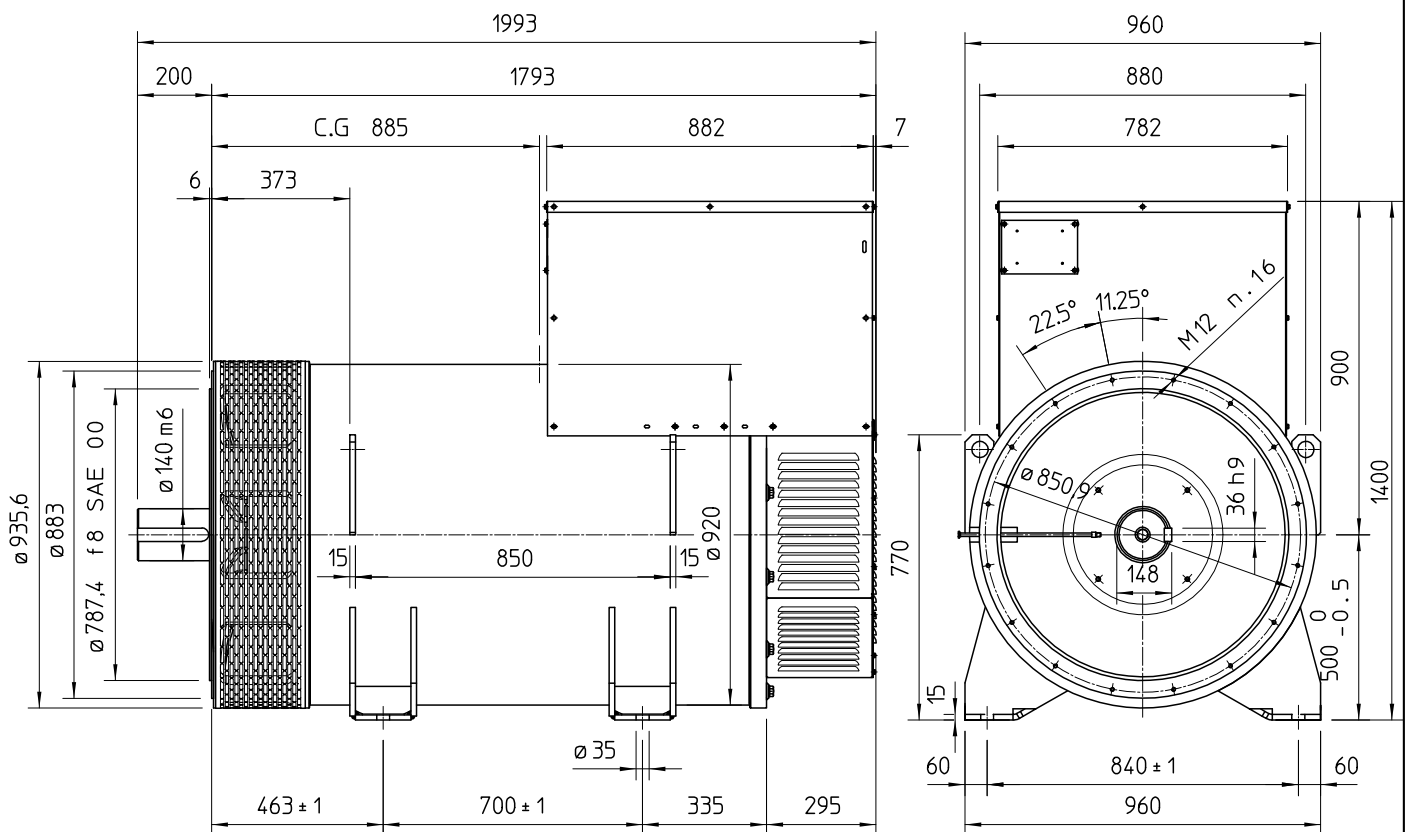

C.G.= GRAVITY CENTER


SINGLE BEARING MOMENTS OF INERTIA

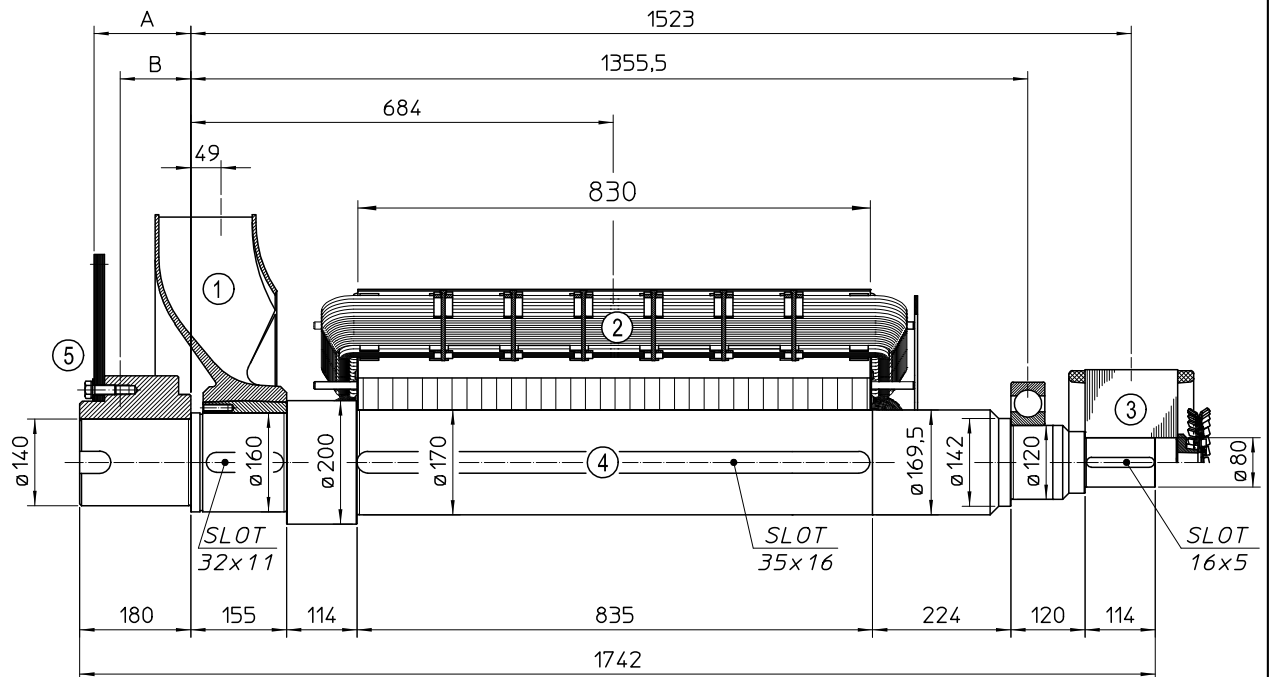

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	42.7	2,250
2	MAIN ROTOR	1460	61.265
3	EX. ROTOR	74.7	0,909
4	SHAFT	269.5	0.934
TOTAL		1846.9	65.358

SAE N°	5		SHAFTS COUPLING FLEX PLATE	
	A	B	WEIGHT kg	J kgm ²
18	172.7	113.4	82.7	1.863
21	157	114.6	93,6	3,206

SINGLE BEARING DIMENSIONS

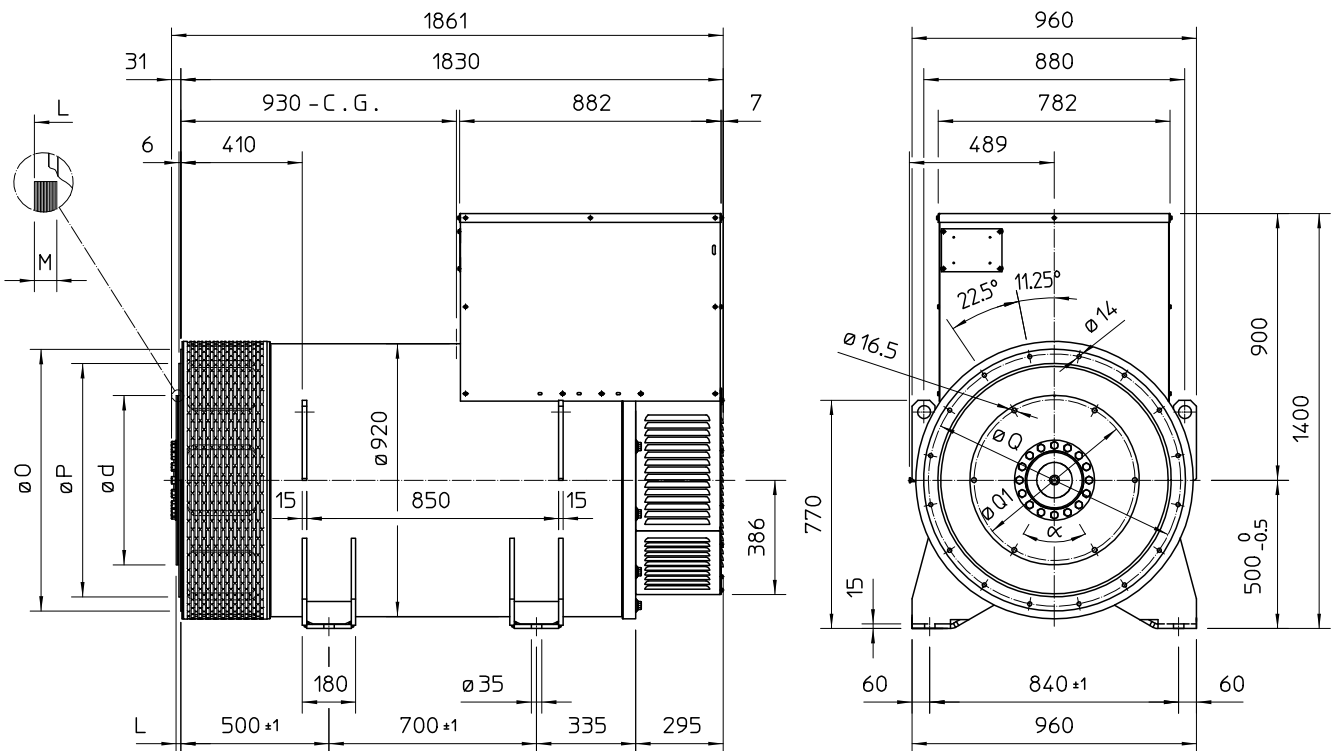

SAE N°	FLANGE		
	O	P	Q
0	711	647.7	679.5
00	883	787.4	850.9

SAE N°	DISC COUPLING						
	d	L	M	Q1	HOLES N°	α	
18	571.5	15.7	15	542.92	6	60°	
21	673.1	0	17	641.35	12	30°	

C.G.= GRAVITY CENTER