



GENERATOR TYPE ECP 3-2S/2

Document : **DS154A/1**










issue 002 date 05/05/2014

Electrical Characteristics										
Frequency	Hz	50				60				
Voltage (series star)	V	380	400	415	440	415	440	460	480	
Rated power class H	kVA	10	10	10	8,5	10,5	12	12	12	
	kW	8	8	8	6,8	8,4	9,6	9,6	9,6	
Rated power class F	kVA	9	9	9	7,5	9	10,8	10,8	10,8	
	kW	7,2	7,2	7,2	6	7,2	8,6	8,6	8,6	
Regulation with	DSR	±1 % with any power factor and speed variations between -5% +30%								
Insulation class		H								
Execution		Brushless								
Stator winding		12 ends								
Rotor		with damping cage								
Efficiencies class H	4/4	%	80,4	80,5	80,2	80	82,1	82,6	82,7	82,8
(see graph. for details)	3/4	%	80,7	81	80,9	80,6	82,6	82,8	83	83,2
	2/4	%	77,4	77,5	77,5	77,2	79,5	79,6	79,7	79,8
	1/4	%	72,1	72	71,8	71,3	72,8	72,6	72,7	73
Reactances (f. l.cl. F)	Xd	%	346,8	313	290,8	219,9	366,4	372,5	340,8	313
	Xd'	%	35,8	32,3	30	22,7	37,8	38,4	35,2	32,3
	Xd''	%	18,5	16,7	15,5	11,7	19,5	19,9	18,2	16,7
	Xq	%	108	97,5	90,6	68,5	114,1	116	106,2	97,5
	Xq'	%	108	97,5	90,6	68,5	114,1	116	106,2	97,5
	Xq''	%	41,7	37,6	34,9	26,4	44	44,7	40,9	37,6
	X ₂	%	20,7	18,7	17,4	13,1	21,9	22,3	20,4	18,7
	X ₀	%	7,5	6,8	6,3	4,8	8	8,1	7,4	6,8
Short Circuit Ratio	Kcc		0,36	0,48	0,69	1,31	0,23	0,31	0,36	0,48
Time Constants	Td'	sec.	0,072							
	Td''	sec.	0,012							
	Tdo'	sec.	0,63							
	T _α	sec.	0,006							
Short Circuit Current Capacity		%	>300				>320			
Excitation at no load	Amp.		0,2	0,25	0,3	0,4	0,16	0,17	0,2	0,23
Excitation at full load	Amp.		1	1,06	1,1	1,2	0,8	0,85	0,9	1
Overload (long-term)		%	1 hour in a 6 hours period 110% rated load							
Overload per 20 sec.		%	300							
Stator Winding Resistance (20°C)	Ω		0,542							
Rotor Winding Resistance (20°C)	Ω		7,364							
Exciter Resistance (20 °C)	Ω		Rotor : 1,453				Stator : 15,71			
Heat dissipation at f.l.cl.H	W		1950	1938	1975	1700	1831	2022	2008	1994
Telephone Interference			THF < 2%				TIF < 45			
Radio interference			EN61000-6-3, EN61000-6-2. For others standards apply to factory							
Waveform Distors.(THD) at f. load	LL/LN %		4,8 / 4,6							
Waveform Distors.(THD) at no load	LL/LN %		4,1 / 3,9							
Mechanical characteristics										
Protection			IP 23 (other protection on request)							
DE bearing			6308-2RS							
NDE bearing			6305-2RS							
Weight of wound stator assembly	kg		19							
Weight of wound rotor assembly	kg		10,8							
Weight of complete generator	kg		62							
Maximun overspeed	rpm		4500							
Unbalanced magnetic pull at f.l.cl.F	kN/mm		2,6							
Cooling air requirement	m³/min		6,3				7,8			
Inertia Constant (H)	sec.		0,197				0,237			
Noise level at 1m/7m	dB(A)		85 / 70				89 / 73			










All technical data are to be considered as a reference and they can be modified without any notice.

This document is a propriety of Mecc Alte S.p.a..All rights reserved.


50 Hz

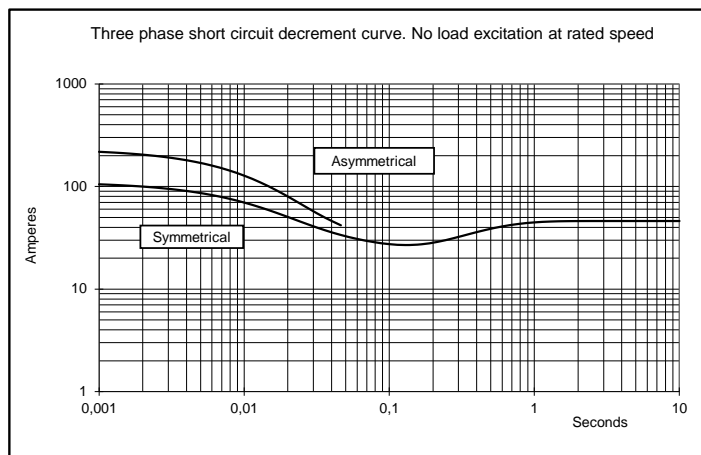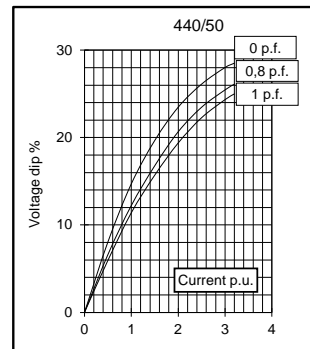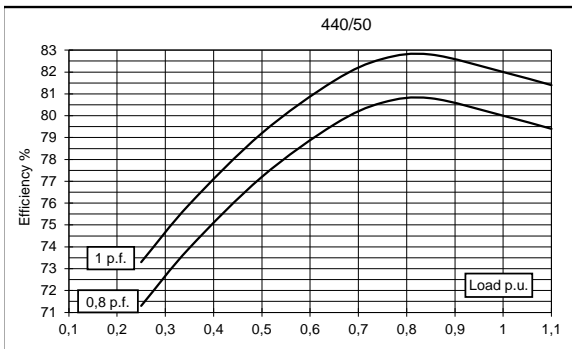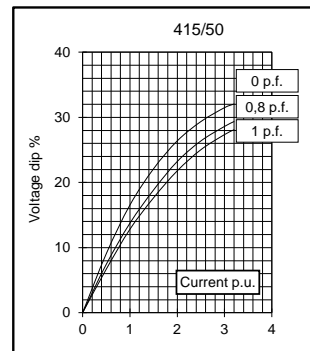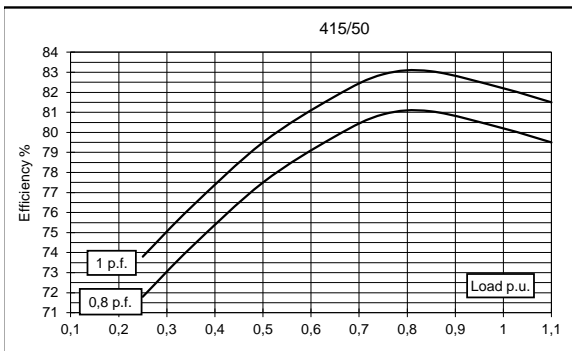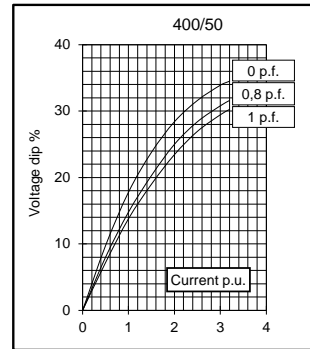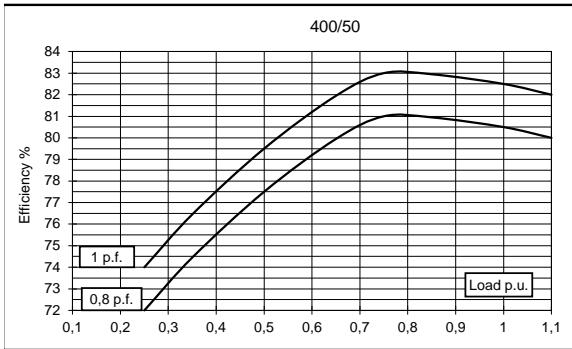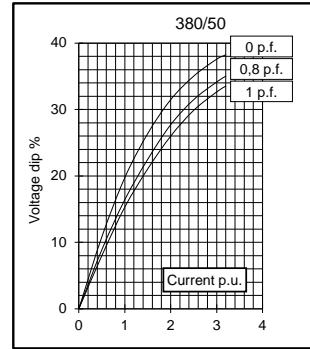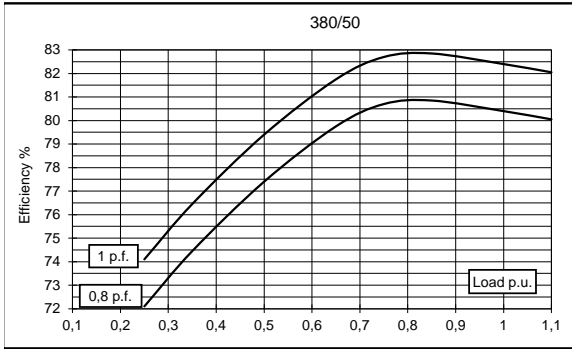

60 Hz

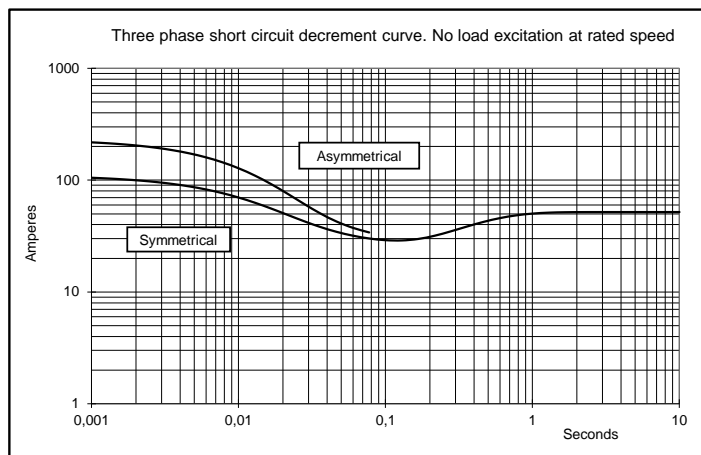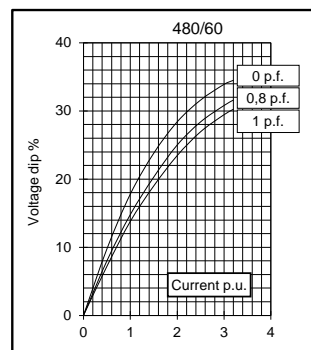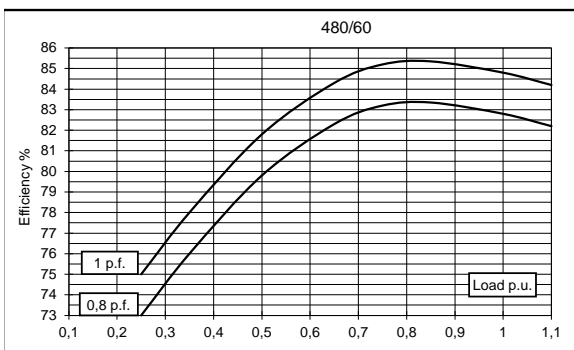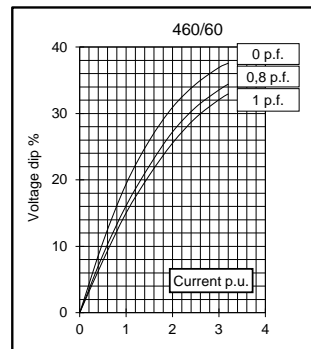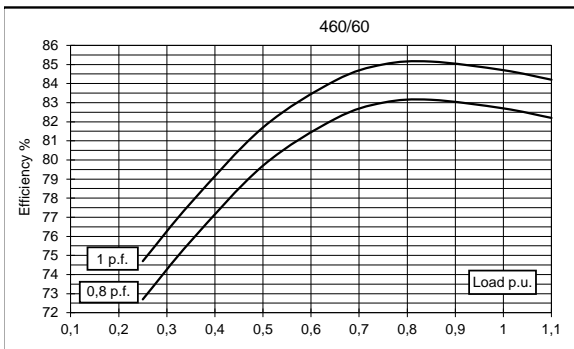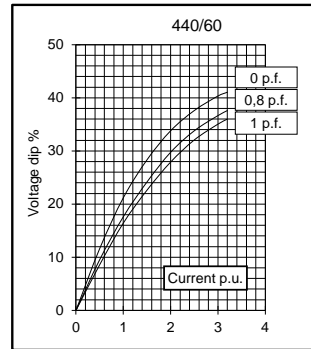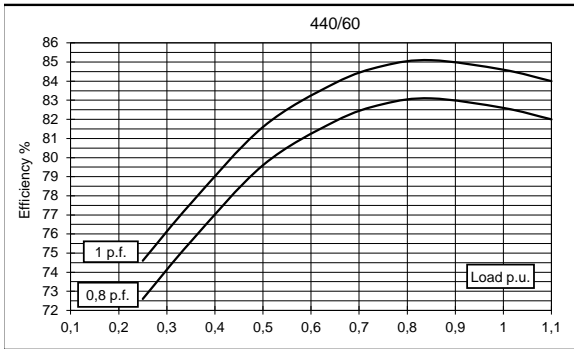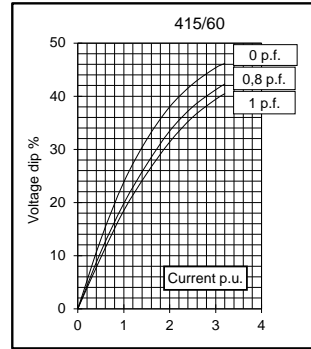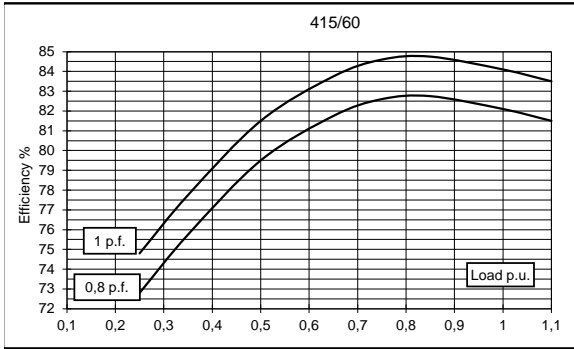


TWO BEARING MOMENTS OF INERTIA

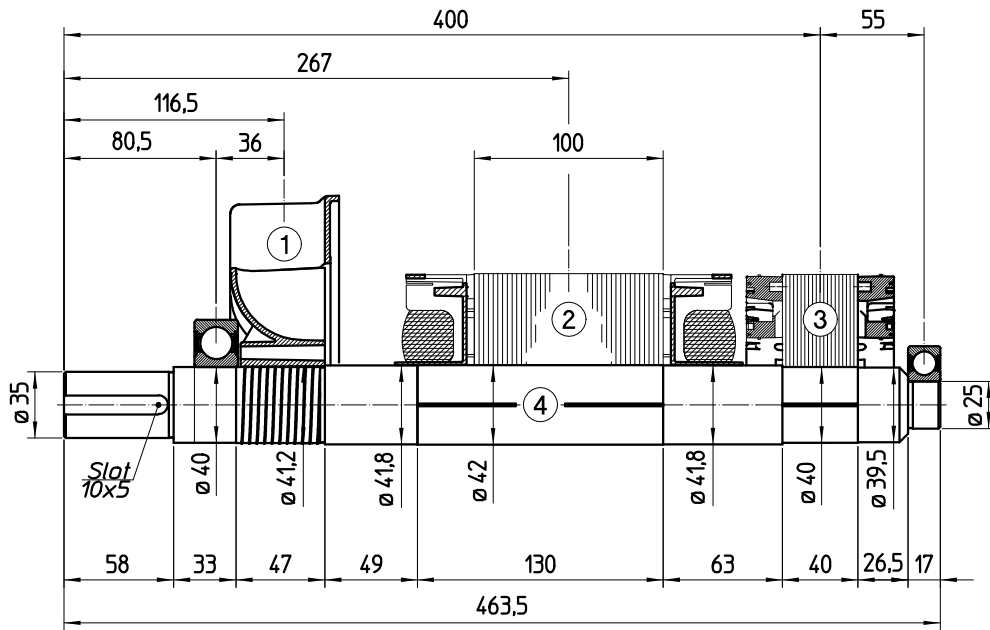


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0.4	0,00206
2	MAIN ROTOR	10,8	0,02570
3	EX. ROTOR	4,2	0,01086
4	SHAFT	4,5	0,00093
TOTAL		19,9	0,03955

TWO BEARING DIMENSIONS

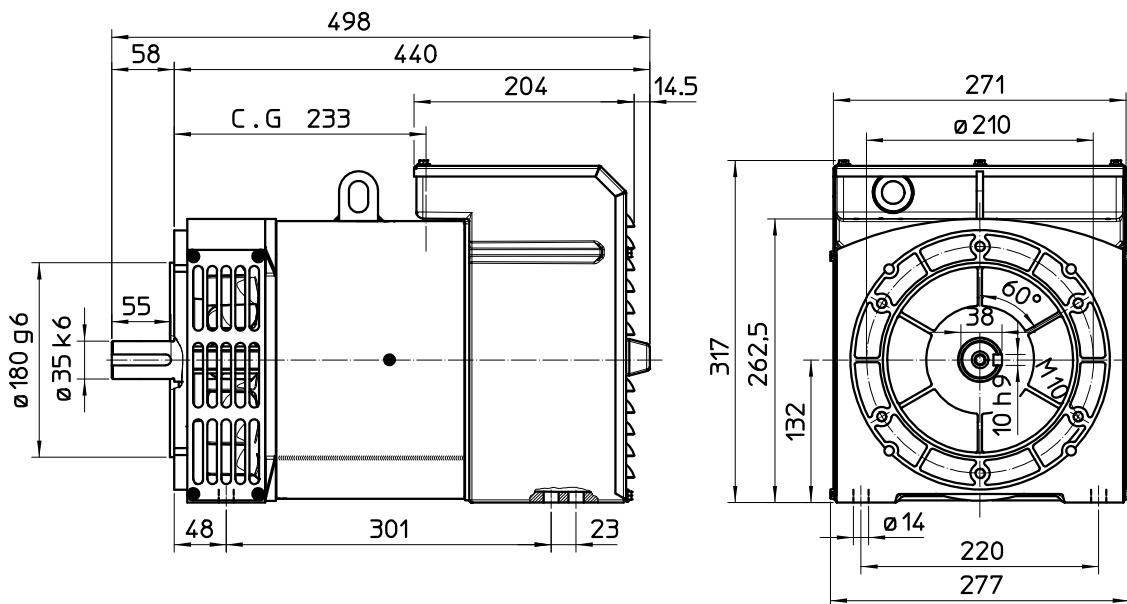


SINGLE BEARING MOMENTS OF INERTIA

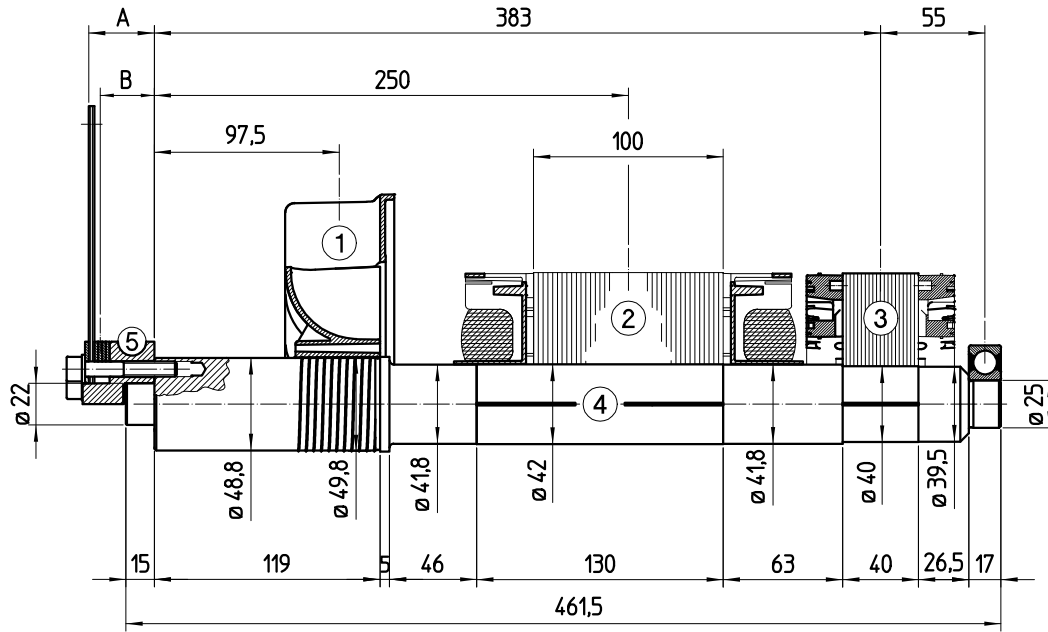

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0,4	0,00206
2	MAIN ROTOR	10,8	0,02570
3	EX. ROTOR	4,2	0,01086
4	SHAFT	5,1	0,00123
TOTAL		20,5	0,03985

SAE N°	SHAFTS COUPLING FLEX PLATE		WEIGHT kg	J kgm ²
	A	B		
5				
6 1/2	3	1,5	1,00	0,00495
7 1/2	3	1,5	1,20	0,00769
8	34,6	29,5	1,75	0,01114
10	26,6	23,5	2,14	0,02220
11 1/2	13	11	2,60	0,03524

SINGLE BEARING DIMENSIONS

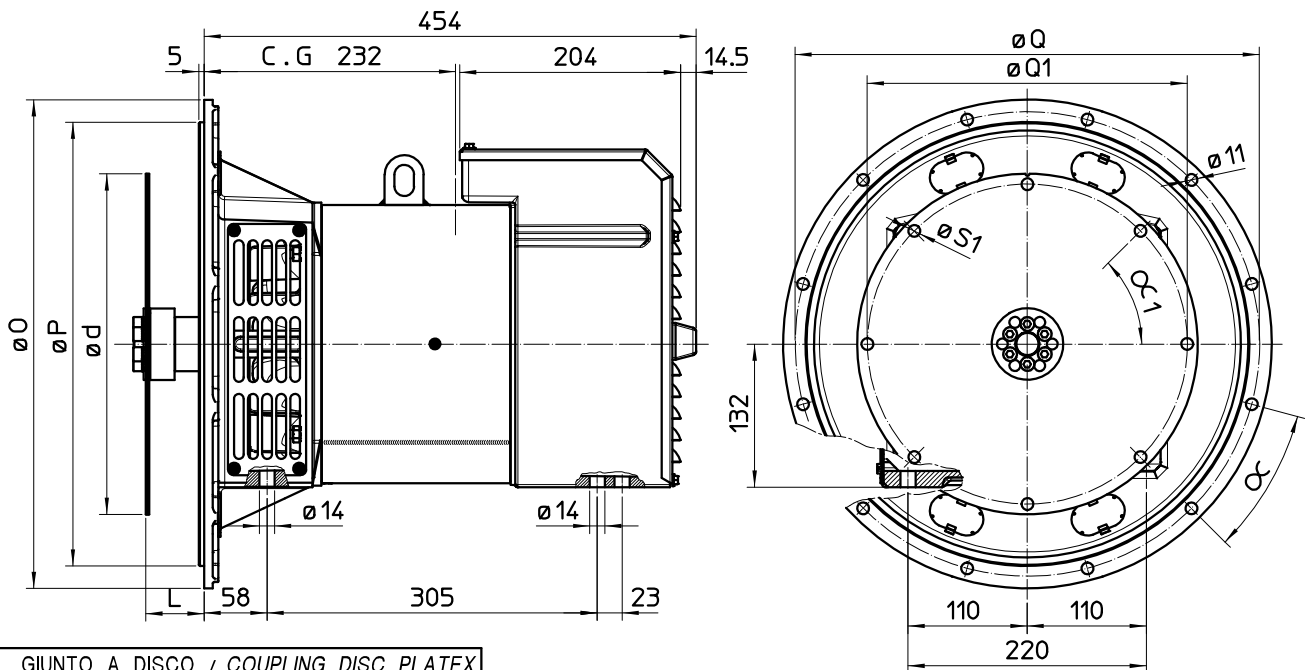

GIUNTO A DISCO / COUPLING DISC PLATEX						
SAE	L	d	Q1	Fori N° Holes N°	S1	∠1
6 †	30,2	215,9	200	6	9	60°
7 †	30,2	241,3	222,25	8	9	45°
8	62	263,52	244,47	6	11	60°
10	53,8	314,52	295,27	8	11	45°
11 †	39,6	352,42	333,37	8	11	45°

FLANGIE / FLANGE					
SAE	O	P	Q	Fori N° Holes N°	∠
6	308	266,7	285,75	8	22°30'
5	356	314,3	333,4	8	22°30'
4	403	362	381	12	15°
3	451	409,6	428,6	12	15°

C.G.= GRAVITY CENTER