



GENERATOR TYPE HCP 34-2SN/24







Document : DS118A/1
issue 005 date 18/06/2012

Electrical Characteristics			
Frequency	Hz		400
Voltage (star)	V		208
Rated power class H (125 °C)	kVA		90
	kW		72
Rated power class F (105 °C)	kVA		80
	kW		64
Rated power class B (80 °C)	kVA		71
	kW		57
Regulation with	UVR6/1-H400B	±1% with any power factor and speed variations between -5% +30%	
Insulation class		H	
Execution		Brushless	
Stator winding		12 ends	
Submittal Data : 208V, 71KVA, 2000RPM, 400Hz, 3 Phase			MIL-STD-705B
Efficiencies	4/4	%	92,4
(see graph. for details)	3/4	%	91,7
	2/4	%	89,3
	1/4	%	86,3
Reactances	Xd	p.u.	1,12
	Xd'	p.u.	0,11
	Xd''	p.u.	0,05
	Xq	p.u.	0,80
	Xq'	p.u.	0,80
	Xq''	p.u.	0,18
	X ₂	p.u.	0,10
	X ₀	p.u.	0,017
Short Circuit Ratio	Kcc		0,40
Time Constants	Td'	sec.	0,02
	Td''	sec.	0,005
	Tdo'	sec.	0,90
	Tα	sec.	0,085
Short Circuit Current Capacity		%	>300
Excitation at no load		Amp.	0,8
Excitation at full load		Amp.	2,5
Overload (long-term)		%	1 hour in a 6 hours period 110% rated load
Overload per 20 sec.		%	300
Stator Winding Resistance (20 °C)		Ω	0,008
Rotor Winding Resistance (20 °C)		Ω	8,918
Exciter Resistance (20 °C)		Ω	Rotor : 0,65 Stator : 15,28
Heat dissipation		W	5840
Telephone Interference			FHT < 2% ; TIF < 100
Radio interference			EN61000-6-3 EN61000-6-1. For others standards apply to factory
Waveform Distors.(THD) at f. load		% LL	1,6
Individual harmonic max. at f. load		% LL	1
Insulation resistance		MΩ	> 2
High Potential Test		Volts	Main Stator : 2000 Main Rotor : 1500
		Volts	Exciter Stator : 1500 Exciter Rotor : 1500
Phase sequence			1 - 5 - 9
Mechanical characteristics			
Protection			IP 21 (other protection on request)
DE bearing			6314.2RS
NDE bearing			6311.2RS
Weight of complete generator		kg	420
Synchronous Speed		rpm	2000
Maximun overspeed		rpm	2500
Cooling air requirement		m ³ /min	25,5
Noise level at 1m/7m		dB(A)	85 / 71


All technical data are to be considered as a reference and they can be modified without any notice.

This document is a propriety of Mecc Alte S.p.a..All rights reserved.

208V - 400Hz

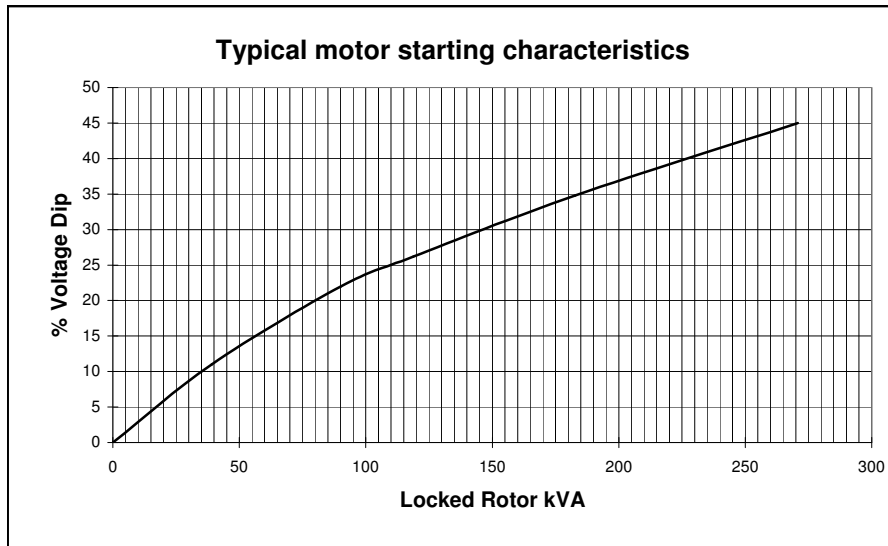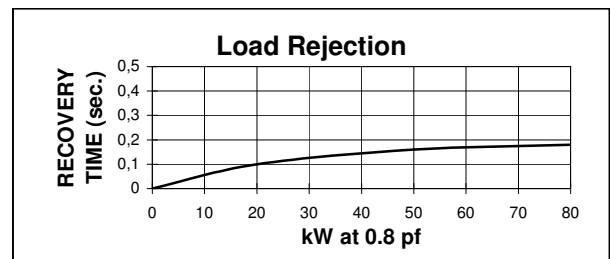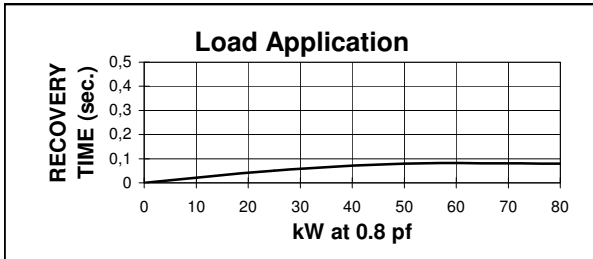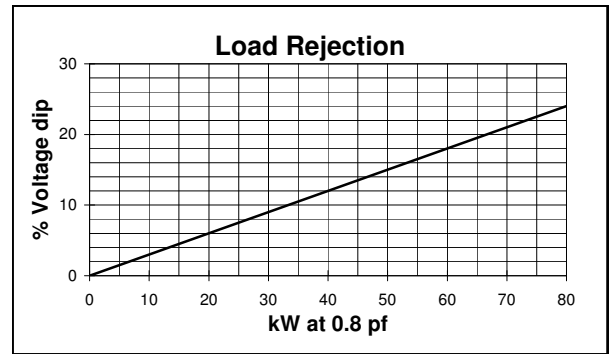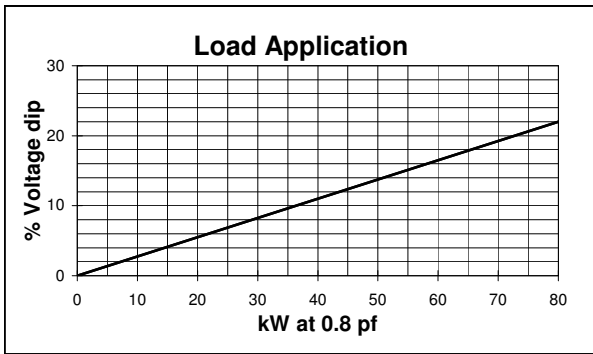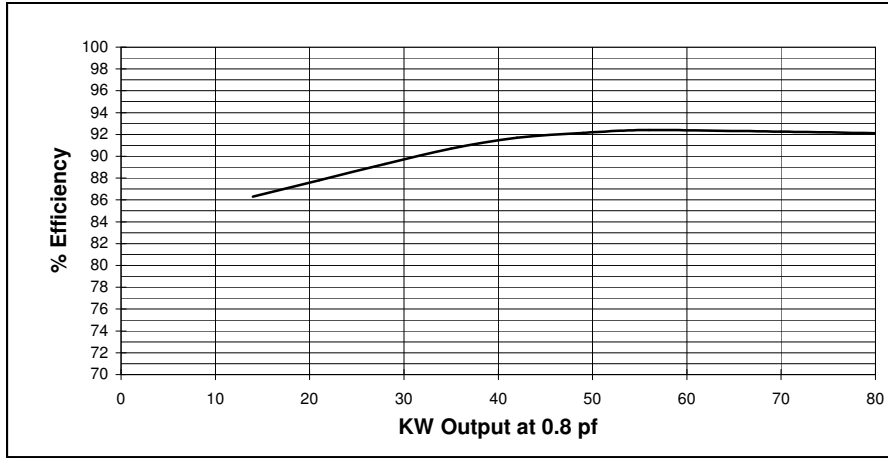


TWO BEARING MOMENTS OF INERTIA

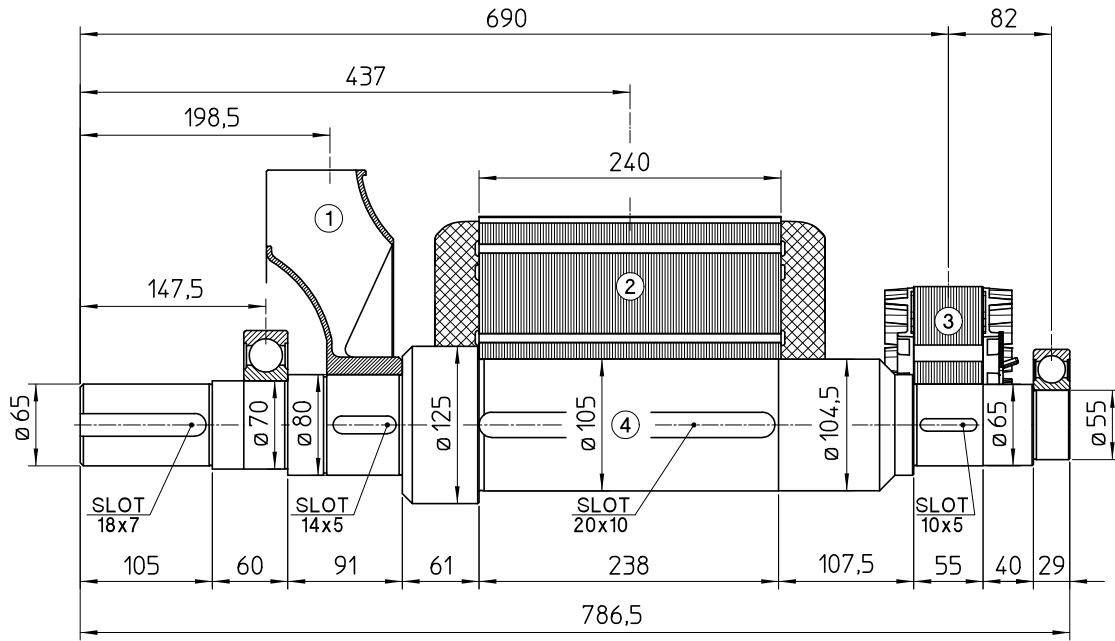


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	3.6	0.0621
2	MAIN ROTOR	124	1.8824
3	EX. ROTOR	14.5	0.0874
4	SHAFT	38.8	0.0476
TOTAL		180.9	2.0795

TWO BEARING DIMENSIONS

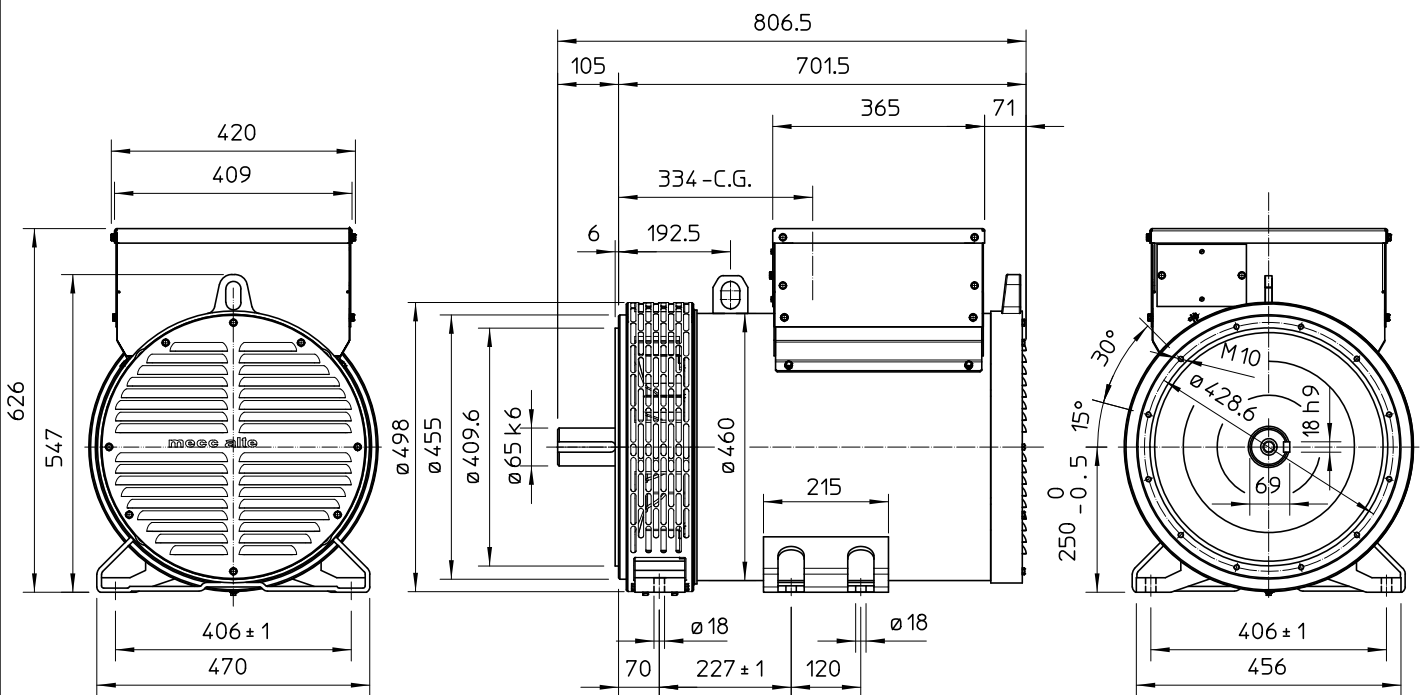

C.G.= GRAVITY CENTER


SINGLE BEARING MOMENTS OF INERTIA

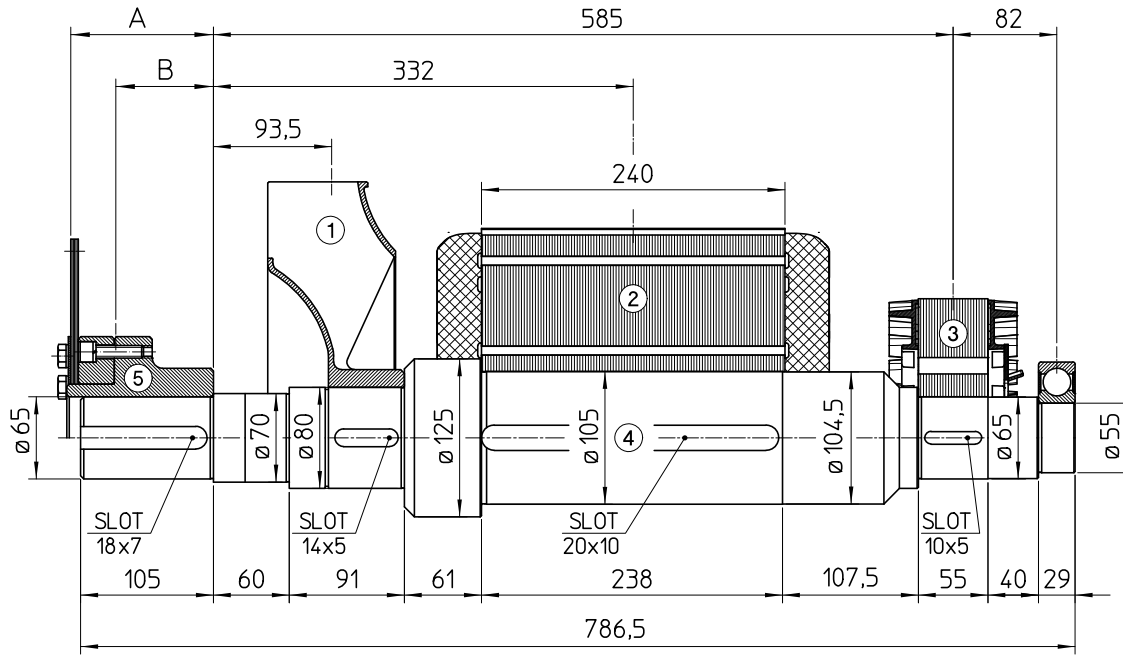

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	3.6	0.0621
2	MAIN ROTOR	124	1.8824
3	EX. ROTOR	14.5	0.0874
4	SHAFT	38.8	0.0476
TOTAL		180.9	2.0795

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm ²)
5	SHAFTS COUPLING FLEX PLATE	10	112.8	77.2	13.5	0.0770
		11 1/2	98.4	71.5	12.4	0.0956
		14	84.4	68.6	14.8	0.2360

SINGLE BEARING DIMENSIONS

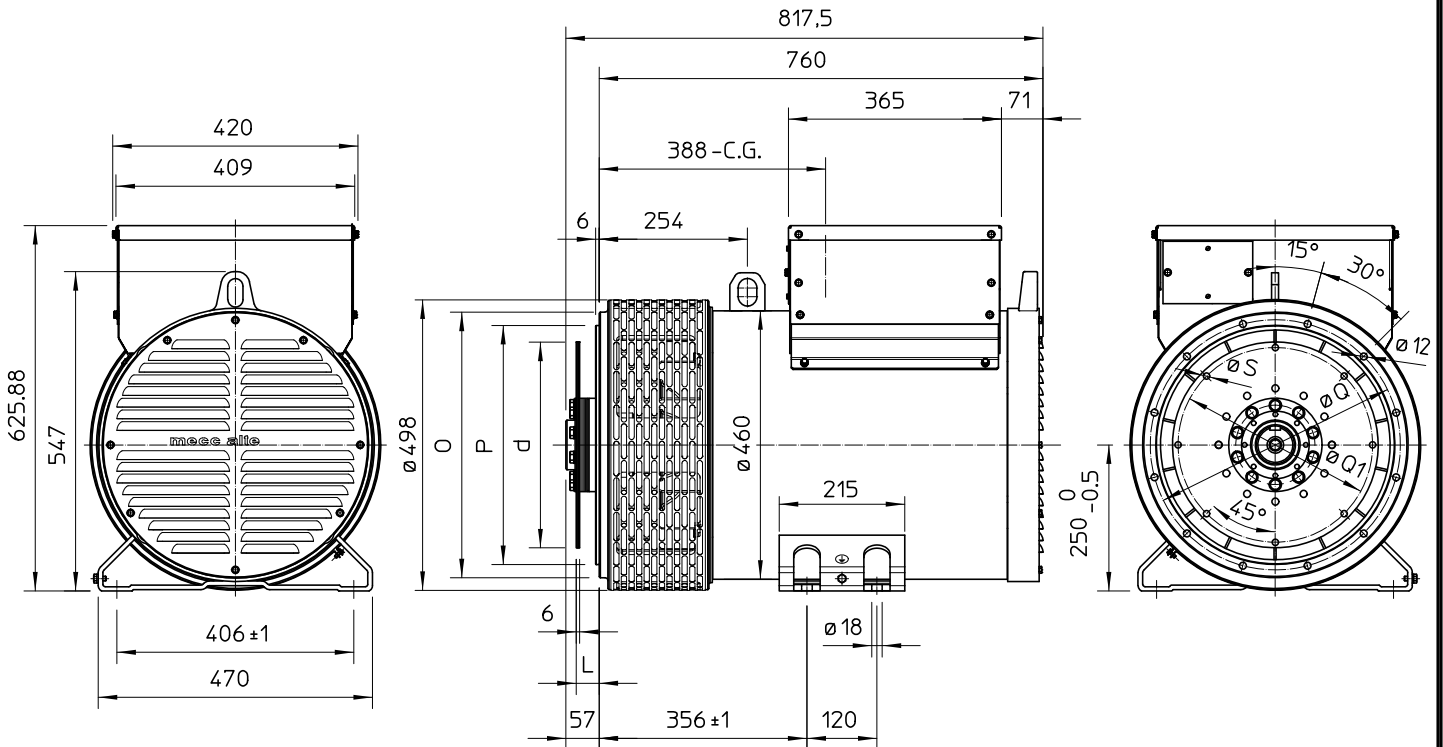

SAE N°	FLANGE		
	O	P	Q
3	451	409.6	428.6
2	489	447.7	466.7
1	552	511.2	530.2

SAE N°	DISC COUPLING			
	L	d	Q1	S
10	53.8	314.32	295.27	11
11 1/2	39.6	352.42	333.37	11
14	25.4	466.72	438.15	14

C.G.= GRAVITY CENTER