



GENERATOR TYPE HCP 34-3S/20







Document : DS131A/1
issue 001 date 14/02/2012

Electrical Characteristics			
Frequency	Hz		400
Voltage (star)	V		208
Rated power class H (125 °C)	kVA		125
	kW		100
Rated power class F (105 °C)	kVA		115
	kW		92
Rated power class B (80 °C)	kVA		100
	kW		80
Regulation with	UVR6/1-H400B	±1% with any power factor and speed variations between -5% +30%	
Insulation class		H	
Execution		Brushless	
Stator winding		12 ends	
Submittal Data : 208V, 100KVA, 2000RPM, 400Hz, 3 Phase			MIL-STD-705B
Efficiencies	4/4	%	92,4
(see graph. for details)	3/4	%	91,8
	2/4	%	89,6
	1/4	%	86,2
Reactances	Xd	p.u.	1,52
	Xd'	p.u.	0,19
	Xd''	p.u.	0,12
	Xq	p.u.	1,10
	Xq'	p.u.	1,10
	Xq''	p.u.	0,27
	X ₂	p.u.	0,18
	X ₀	p.u.	0,04
Short Circuit Ratio	Kcc		0,43
Time Constants	Td'	sec.	0,04
	Td''	sec.	0,01
	Tdo'	sec.	0,150
	Tα	sec.	0,11
Short Circuit Current Capacity		%	>300
Excitation at no load		Amp.	0,5
Excitation at full load		Amp.	2,5
Overload (long-term)		%	1 hour in a 6 hours period 110% rated load
Overload per 20 sec.		%	300
Stator Winding Resistance (20 °C)		Ω	0,0163
Rotor Winding Resistance (20 °C)		Ω	4,213
Exciter Resistance (20 °C)		Ω	Rotor : 0,412 Stator : 15,18
Heat dissipation		W	8.225
Telephone Interference			FHT < 2% ; TIF < 100
Radio interference			EN61000-6-3 EN61000-6-1. For others standards apply to factory
Waveform Distors.(THD) at f. load		% LL	4,5
Individual harmonic max. at f. load		% LL	4
Insulation resistance		MΩ	> 2
High Potential Test	Volts		Main Stator : 2000 Main Rotor : 1500
	Volts		Exciter Stator : 1500 Exciter Rotor : 1500
Phase sequence			1 - 5 - 9
Mechanical characteristics			
Protection			IP 21 (other protection on request)
DE bearing			6314.2RS
NDE bearing			6311.2RS
Weight of complete generator	kg		380
Synchronous Speed	rpm		2400
Maximun overspeed	rpm		3000
Cooling air requirement	m ³ /min		28
Noise level at 1m/7m	dB(A)		88 / 74


All technical data are to be considered as a reference and they can be modified without any notice.

This document is a propriety of Mecc Alte S.p.a..All rights reserved.

208V - 400Hz

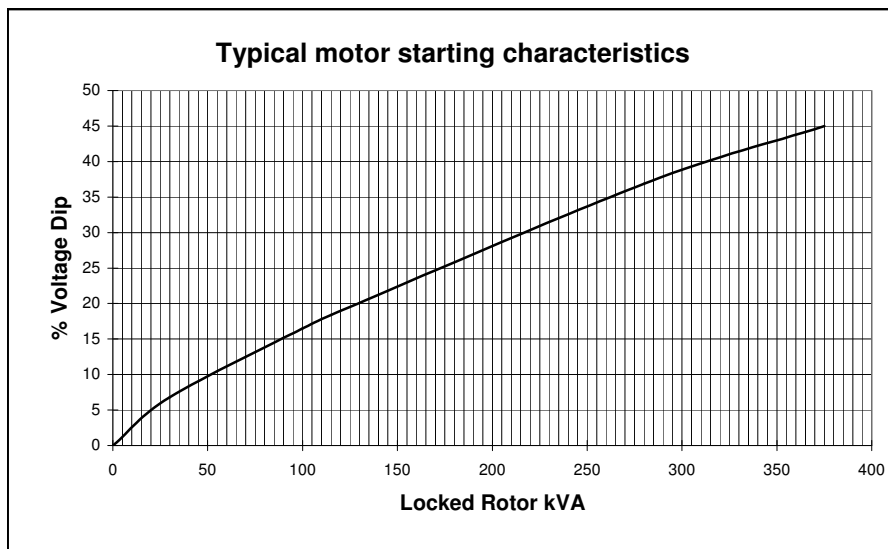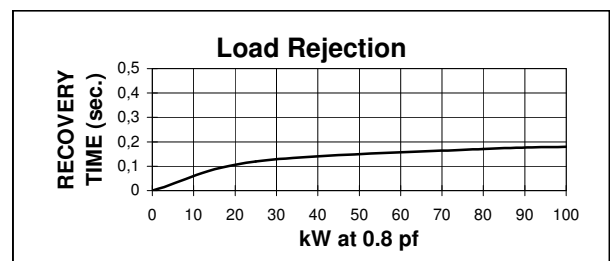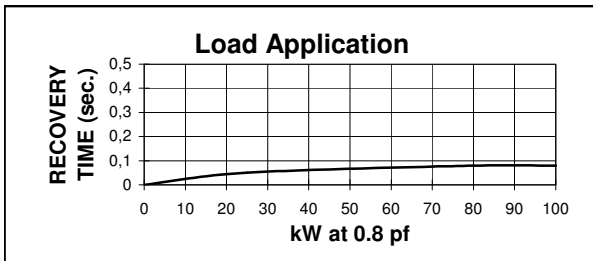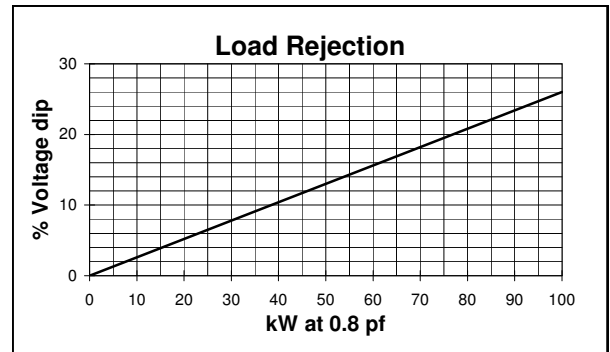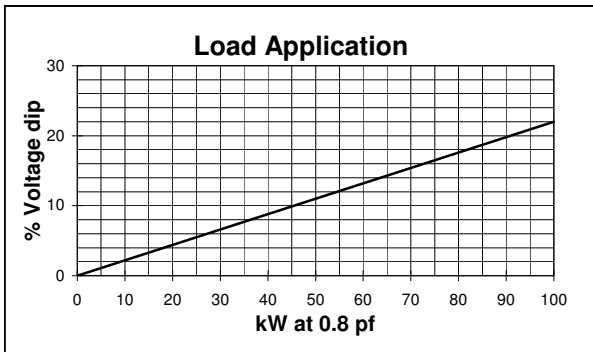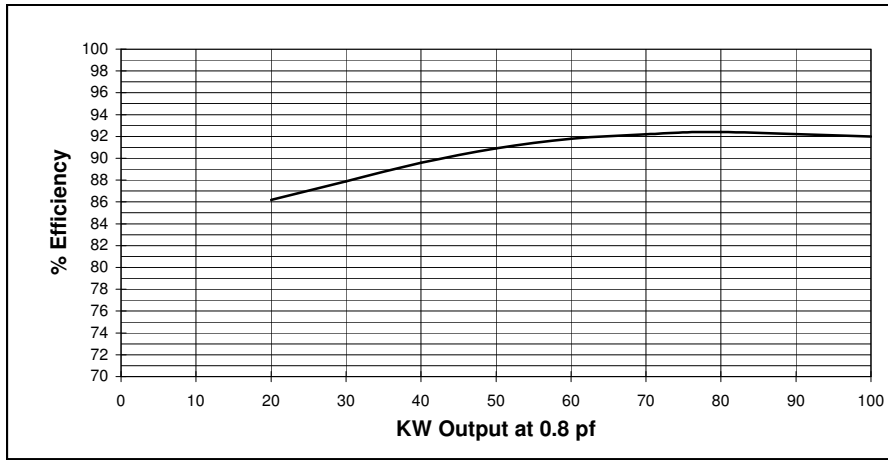


TWO BEARING MOMENTS OF INERTIA

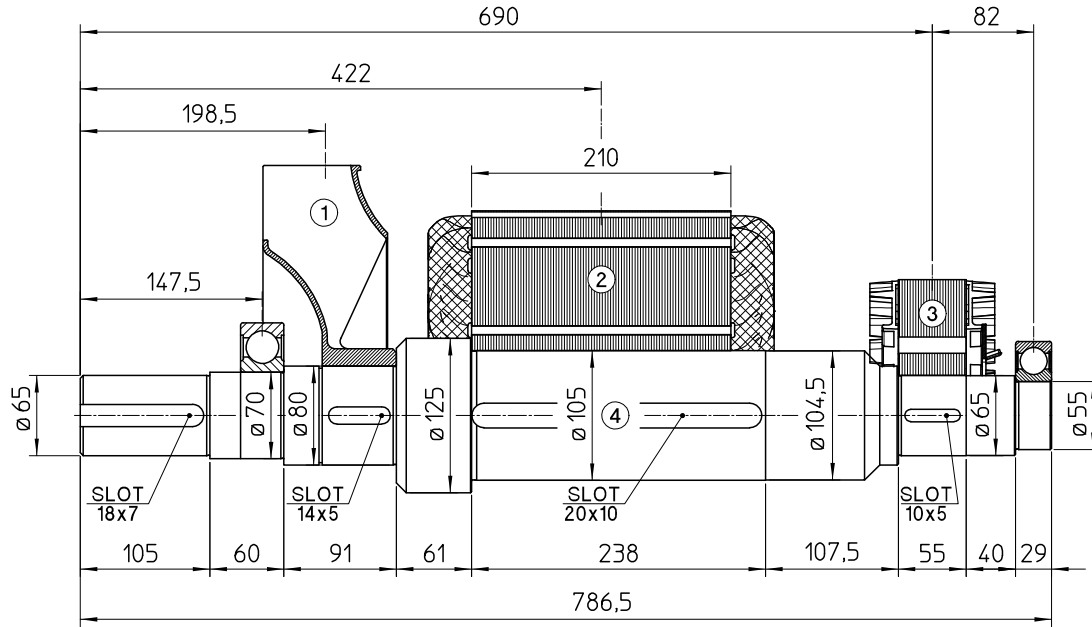


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	3.6	0.0621
2	MAIN ROTOR	114.5	1.7501
3	EX. ROTOR	14.5	0.0874
4	SHAFT	38.8	0.0476
TOTAL		171.4	1.9472

TWO BEARING DIMENSIONS

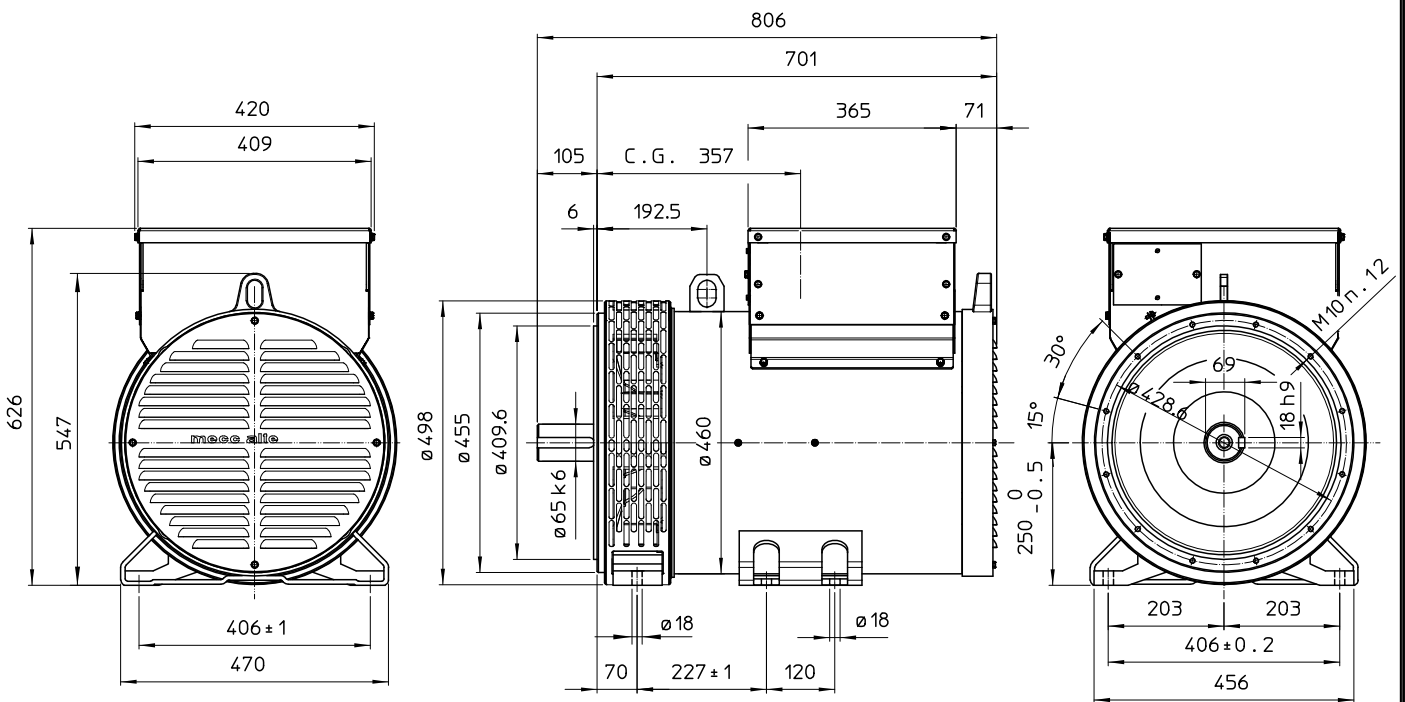

C.G.= GRAVITY CENTER


SINGLE BEARING MOMENTS OF INERTIA

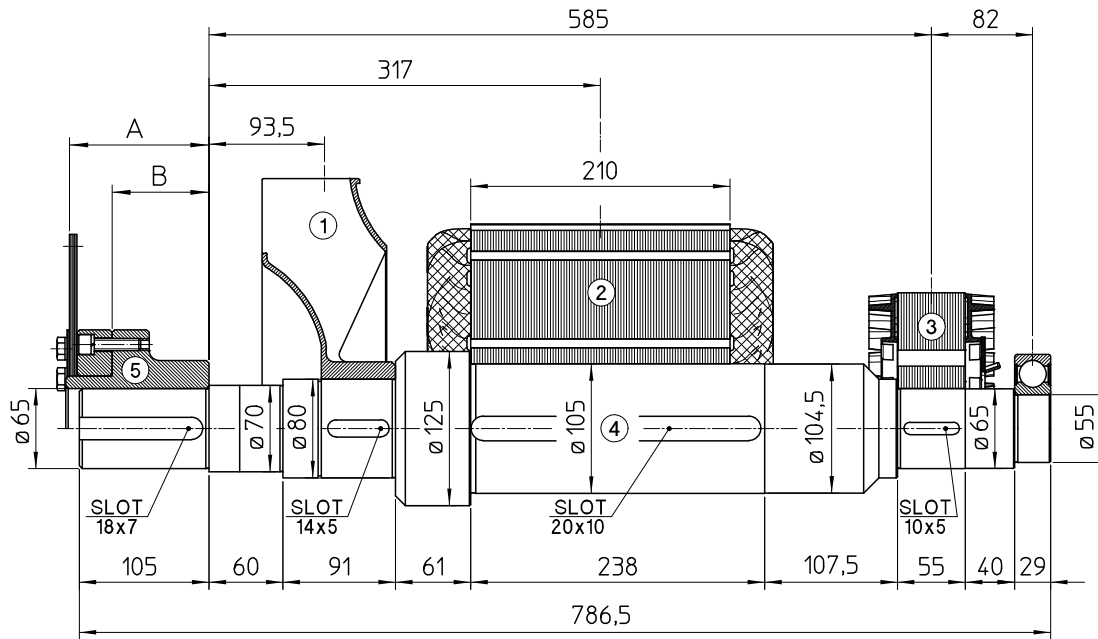

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	3.6	0.0621
2	MAIN ROTOR	114.5	1.7501
3	EX. ROTOR	14.5	0.0874
4	SHAFT	38.8	0.0476
TOTAL		171.4	1.9472

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm ²)
5	SHAFTS COUPLING FLEX PLATE	10	112.8	77.2	13.5	0.0770
		11 1/2	98.4	71.5	12.4	0.0956
		14	84.4	68.6	14.8	0.2360

SINGLE BEARING DIMENSIONS

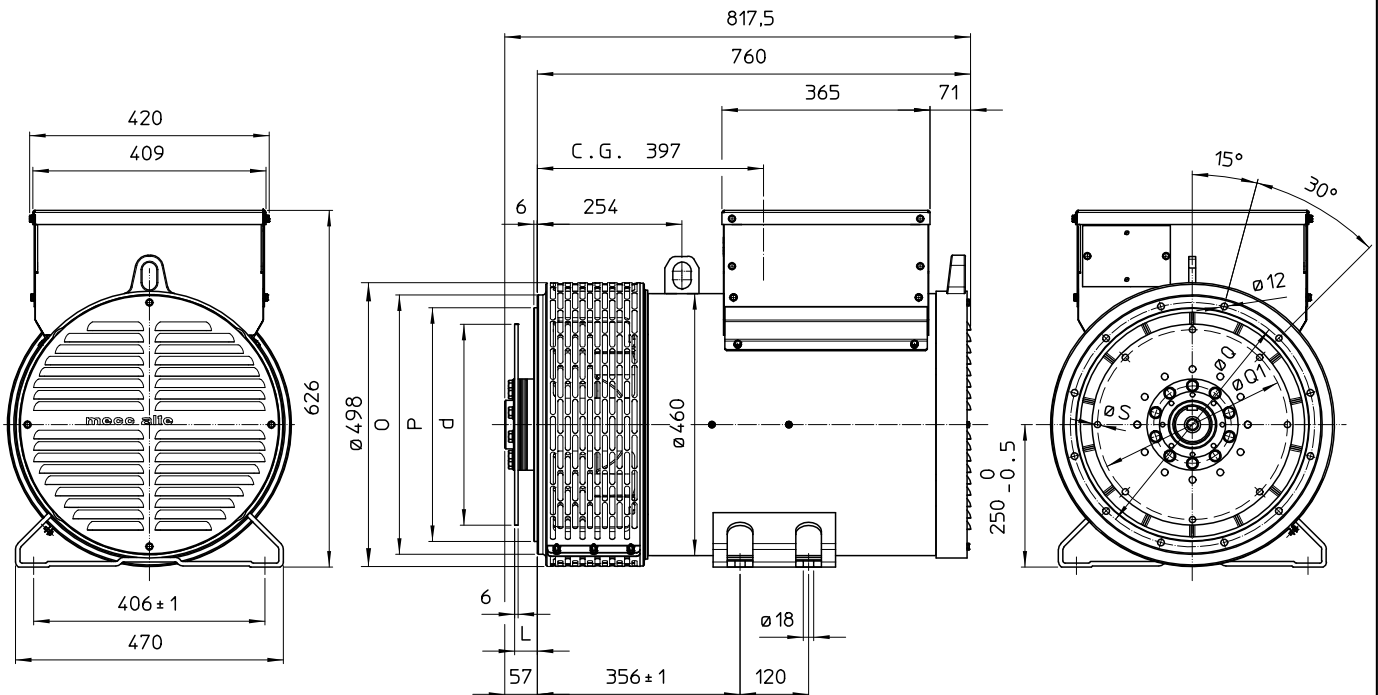

SAE N°	FLANGE		
	O	P	Q
3	451	409.6	428.6
2	489	447.7	466.7
1	552	511.2	530.2

SAE N°	DISC COUPLING			
	L	d	Q1	S
10	53.8	314.32	295.27	11
11 1/2	39.6	352.42	333.37	11
14	25.4	466.72	438.15	14

C.G.= GRAVITY CENTER