



GENERATOR TYPE ECP 3-1S/2










Document : **DS153A/1**
issue 002 date 05/05/2014

Electrical Characteristics										
Frequency	Hz	50				60				
Voltage (series star)	V	380	400	415	440	415	440	460	480	
Rated power class H	kVA	8	8	8	6,8	8,5	9,6	9,6	9,6	
	kW	6,4	6,4	6,4	5,4	6,8	7,7	7,7	7,7	
Rated power class F	kVA	7,2	7,2	7,2	6	7	8,6	8,6	8,6	
	kW	5,8	5,8	5,8	4,8	5,6	6,9	6,9	6,9	
Regulation with	DSR	±1 % with any power factor and speed variations between -5% +30%								
Insulation class		H								
Execution		Brushless								
Stator winding		12 ends								
Rotor		with damping cage								
Efficiencies class H	4/4	%	78,4	78,5	78,2	78	79,2	79,7	79,8	79,9
(see graph. for details)	3/4	%	79,2	79,5	79,4	79,1	80,2	80,4	80,6	80,8
	2/4	%	75,9	76	76	75,7	77,1	77,2	77,3	77,4
	1/4	%	72,1	72	71,8	71,3	72,8	72,6	72,7	73
Reactances (f. l.cl. F)										
	Xd	%	380,1	343	318,7	241	406,3	408,2	373,5	343
	Xd'	%	36,6	33	30,7	23,2	39,1	39,3	35,9	33
	Xd''	%	20,6	18,6	17,3	13,1	22	22,1	20,3	18,6
	Xq	%	106,4	96	89,2	67,4	113,7	114,2	104,5	96
	Xq'	%	106,4	96	89,2	67,4	113,7	114,2	104,5	96
	Xq''	%	46,6	42,1	39,1	29,6	49,9	50,1	45,8	42,1
	X ₂	%	21,1	19	17,7	13,3	22,5	22,6	20,7	19
	X ₀	%	8,1	7,3	6,8	5,1	8,6	8,7	7,9	7,3
Short Circuit Ratio	Kcc		0,33	0,45	0,66	1,50	0,25	0,28	0,33	0,45
Time Constants	Td'	sec.	0,068							
	Td''	sec.	0,014							
	Tdo'	sec.	0,55							
	Tα	sec.	0,005							
Short Circuit Current Capacity		%	>300				>320			
Excitation at no load	Amp.		0,2	0,25	0,3	0,4	0,17	0,18	0,2	0,22
Excitation at full load	Amp.		1,1	1,12	1,2	1,3	0,8	0,9	1	1,1
Overload (long-term)		%	1 hour in a 6 hours period 110% rated load							
Overload per 20 sec.		%	300							
Stator Winding Resistance (20°C)	Ω		0,804							
Rotor Winding Resistance (20°C)	Ω		6,702							
Exciter Resistance (20 °C)	Ω		Rotor : 1,453				Stator : 15,71			
Heat dissipation at f.l.cl.H	W		1763	1753	1784	1534	1786	1956	1944	1932
Telephone Interference			THF < 2%				TIF < 45			
Radio interference			EN61000-6-3, EN61000-6-2. For others standards apply to factory							
Waveform Distors.(THD) at f. load	LL/LN %		4,9 / 4,8							
Waveform Distors.(THD) at no load	LL/LN %		4,2 / 4,1							
Mechanical characteristics										
Protection			IP 23 (other protection on request)							
DE bearing			6308-2RS							
NDE bearing			6305-2RS							
Weight of wound stator assembly	kg		17							
Weight of wound rotor assembly	kg		9,2							
Weight of complete generator	kg		56							
Maximun overspeed	rpm		4500							
Unbalanced magnetic pull at f.l.cl.F	kN/mm		2,4							
Cooling air requirement	m³/min		6,4				7,8			
Inertia Constant (H)	sec.		0,222				0,267			
Noise level at 1m/7m	dB(A)		85 / 70				89 / 73			

All technical data are to be considered as a reference and they can be modified without any notice.

This document is a propriety of Mecc Alte S.p.a..All rights reserved.

50 Hz

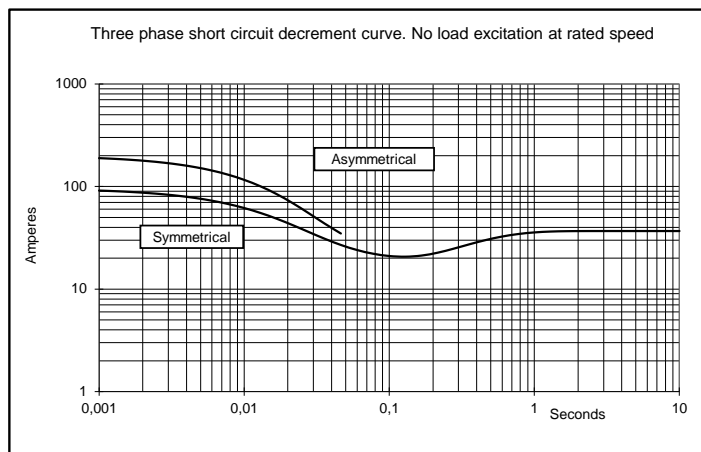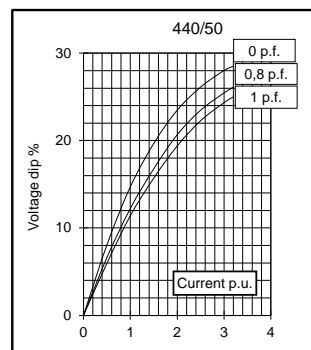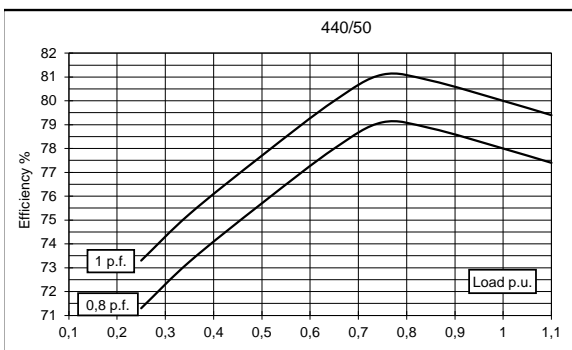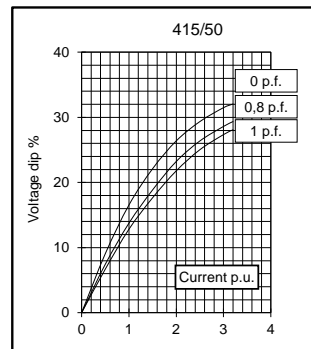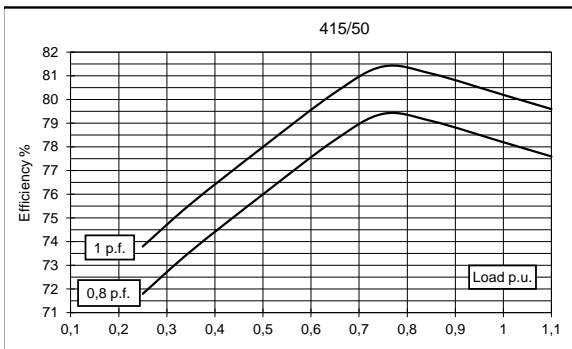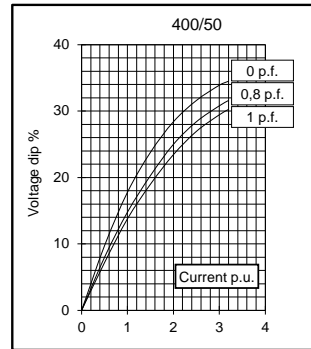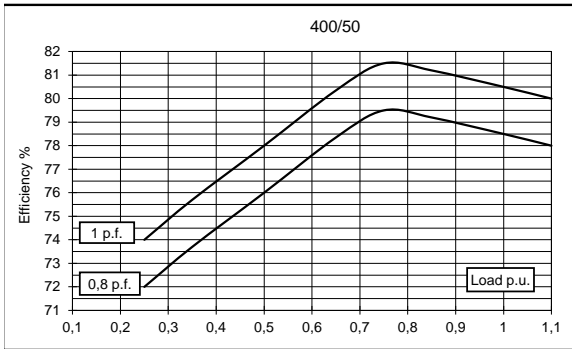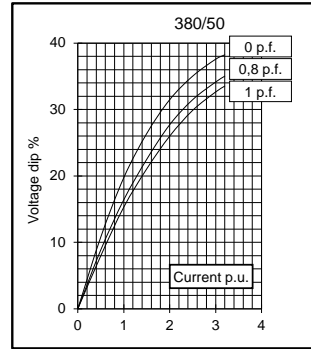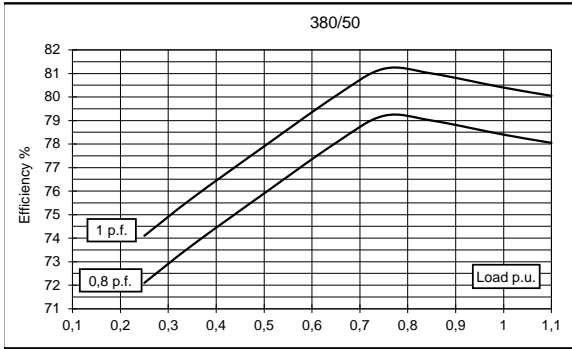












GENERATOR TYPE ECP 3-1S/2


Document : DS153A/3

issue 002 date : 05/05/2014

60 Hz

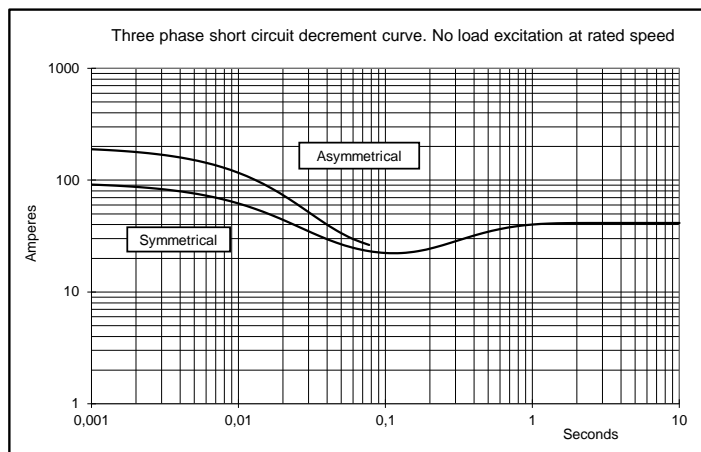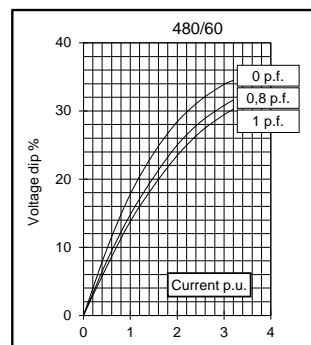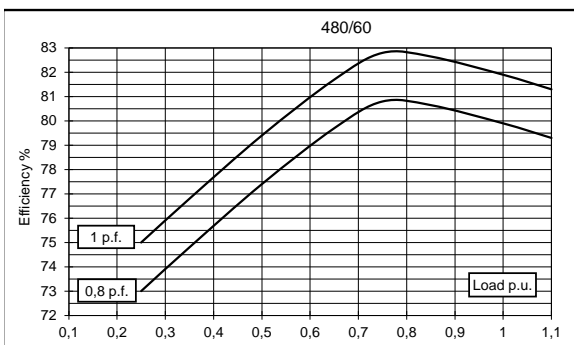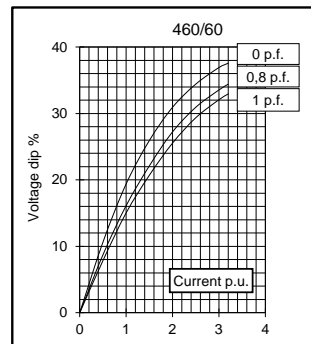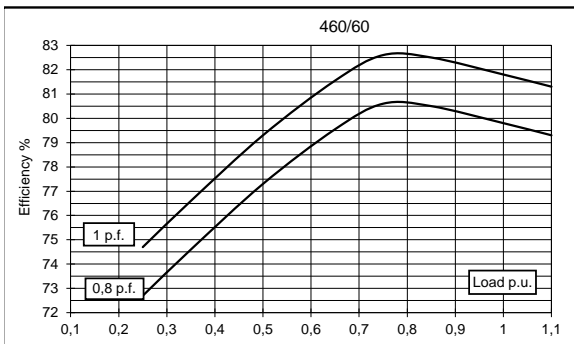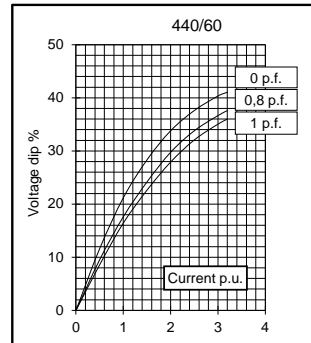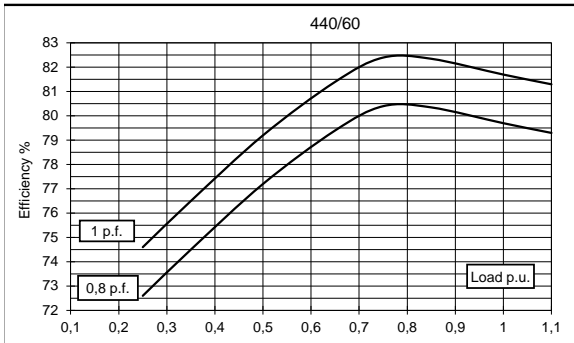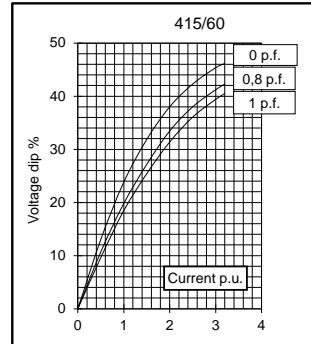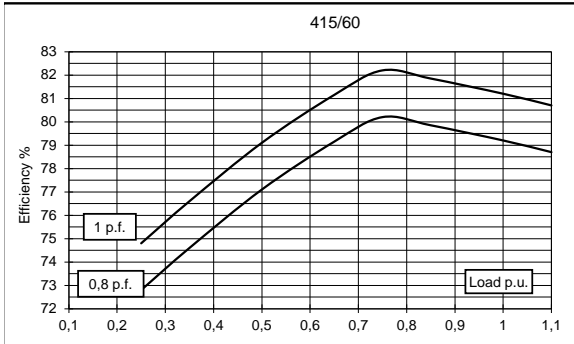


TWO BEARING MOMENTS OF INERTIA

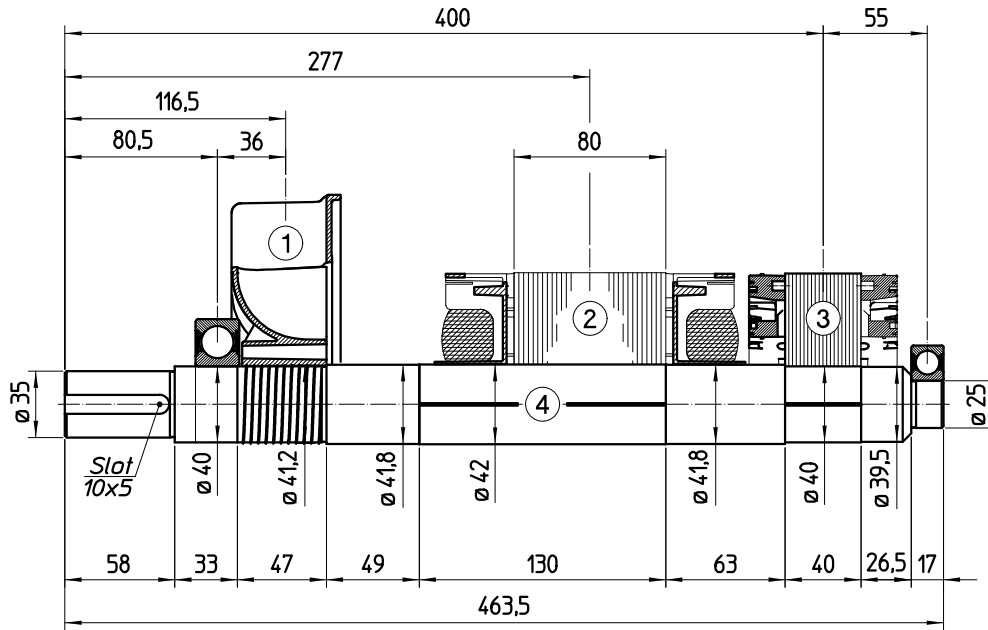


POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0,4	0,00206
2	MAIN ROTOR	9,2	0,02176
3	EX. ROTOR	4,2	0,01086
4	SHAFT	4,5	0,00093
TOTAL		18,3	0,03561

TWO BEARING DIMENSIONS

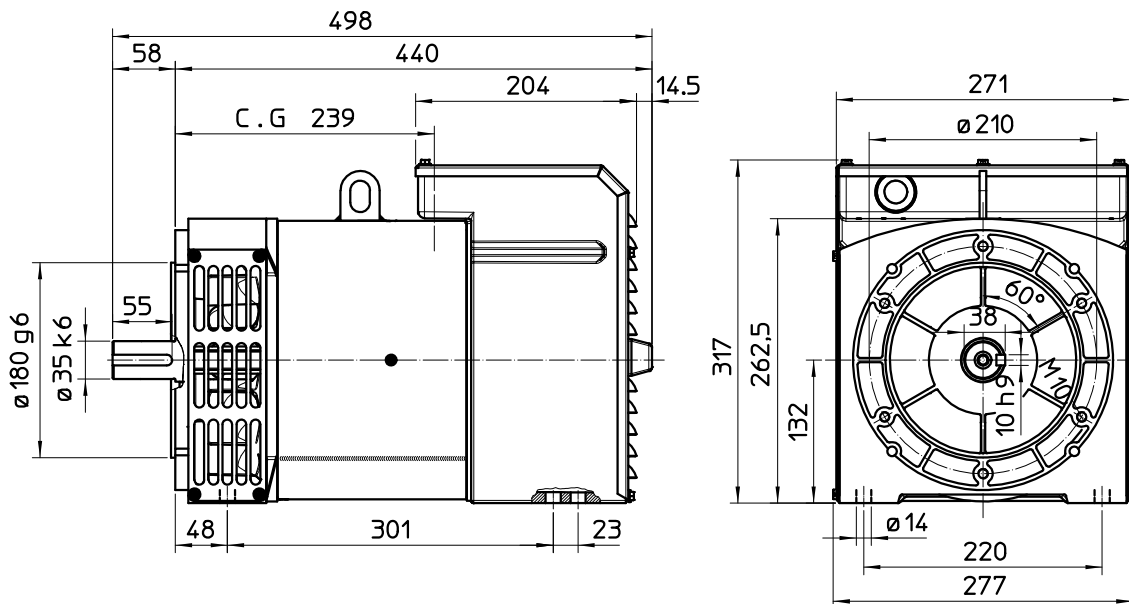


SINGLE BEARING MOMENTS OF INERTIA

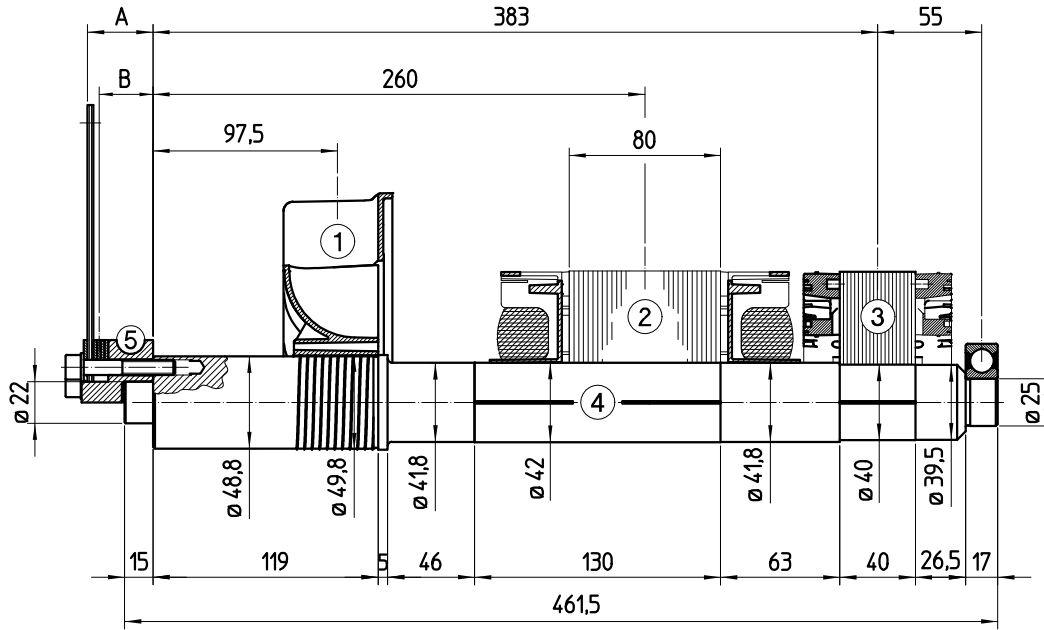

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	0,4	0,00206
2	MAIN ROTOR	9,2	0,02176
3	EX. ROTOR	4,2	0,01086
4	SHAFT	5,1	0,00123
TOTAL		18,9	0,03591

SAE N°	5		SHAFTS COUPLING FLEX PLATE	
	A	B	WEIGHT kg	J kgm ²
6 1/2	3	1,5	1,00	0,00495
7 1/2	3	1,5	1,20	0,00769
8	34,6	29,5	1,75	0,01114
10	26,6	23,5	2,14	0,02220
11 1/2	13	11	2,60	0,03524

SINGLE BEARING DIMENSIONS

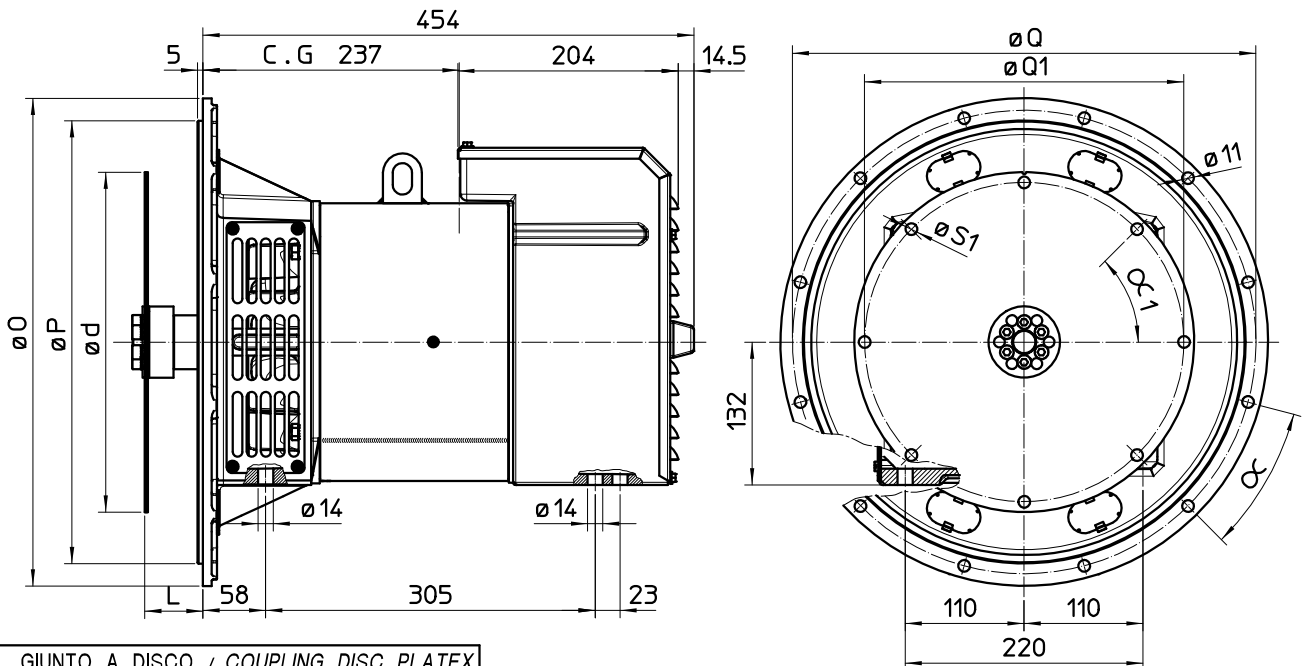

GIUNTO A DISCO / COUPLING DISC PLATEX						
SAE	L	d	Q1	Fori N° Holes N°	S1	∠ ₁
6 ‡	30,2	215,9	200	6	9	60°
7 ‡	30,2	241,3	222,25	8	9	45°
8	62	263,52	244,47	6	11	60°
10	53,8	314,52	295,27	8	11	45°
11 ‡	39,6	352,42	333,37	8	11	45°

FLANGIE / FLANGE					
SAE	O	P	Q	Fori N° Holes N°	∠
6	308	266,7	285,75	8	22°30'
5	356	314,3	333,4	8	22°30'
4	403	362	381	12	15°
3	451	409,6	428,6	12	15°

C.G.= GRAVITY CENTER