



# GENERATOR TYPE HCP 34-2LN/24







Document : DS180A/1  
issue 004 date 07/09/2012

<b>Electrical Characteristics</b>			
Frequency	Hz		400
Voltage (star)	V		208
Rated power class H (125 °C)	kVA		125
	kW		100
Rated power class F (105 °C)	kVA		110
	kW		88
Rated power class B (80 °C)	kVA		100
	kW		80
Regulation with	UVR6/1-H400B	±1% with any power factor and speed variations between -5% +30%	
Insulation class		H	
Execution		Brushless	
Stator winding		12 ends	
<b>Submittal Data : 208V, 100KVA, 2000RPM, 400Hz, 3 Phase</b>			<b>MIL-STD-705B</b>
Efficiencies	4/4	%	92,8
(see graph. for details)	3/4	%	92,3
	2/4	%	89,7
	1/4	%	87
Reactances	Xd	p.u.	1,08
	Xd'	p.u.	0,10
	Xd''	p.u.	0,04
	Xq	p.u.	0,74
	Xq'	p.u.	0,74
	Xq''	p.u.	0,17
	X <sub>2</sub>	p.u.	0,12
	X <sub>0</sub>	p.u.	0,015
Short Circuit Ratio	Kcc		0,41
Time Constants	Td'	sec.	0,03
	Td''	sec.	0,006
	Tdo'	sec.	0,95
	Tα	sec.	0,09
Short Circuit Current Capacity		%	>300
Excitation at no load		Amp.	0,9
Excitation at full load		Amp.	2,6
Overload (long-term)		%	1 hour in a 6 hours period 110% rated load
Overload per 20 sec.		%	300
Stator Winding Resistance (20 °C)		Ω	0,007
Rotor Winding Resistance (20 °C)		Ω	12,24
Exciter Resistance (20 °C)		Ω	Rotor : 0,65    Stator : 15,28
Heat dissipation		W	7759
Telephone Interference			FHT < 2% ; TIF < 100
Radio interference			EN61000-6-3 EN61000-6-1. For others standards apply to factory
Waveform Distors.(THD) at f. load		% LL	1,6
Individual harmonic max. at f. load		% LL	1
Insulation resistance		MΩ	> 2
High Potential Test		Volts	Main Stator : 2000    Main Rotor : 1500
		Volts	Exciter Stator : 1500    Exciter Rotor : 1500
Phase sequence			1 - 5 - 9
<b>Mechanical characteristics</b>			
Protection			IP 21 (other protection on request)
DE bearing			6314.2RS
NDE bearing			6311.2RS
Weight of complete generator		kg	502
Synchronous Speed		rpm	2000
Maximun overspeed		rpm	2500
Cooling air requirement		m <sup>3</sup> /min	25,5
Noise level at 1m/7m		dB(A)	85 / 71


All technical data are to be considered as a reference and they can be modified without any notice.

This document is a propriety of Mecc Alte S.p.a..All rights reserved.

**208V - 400Hz**

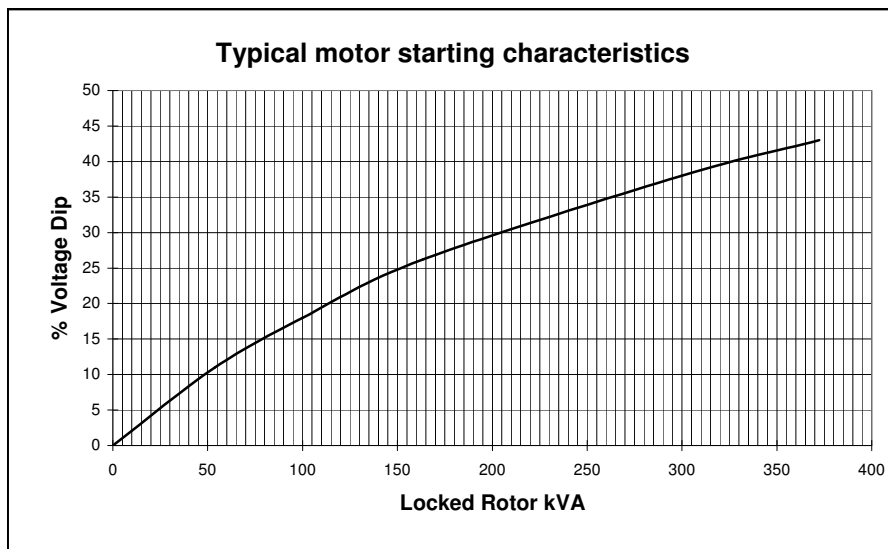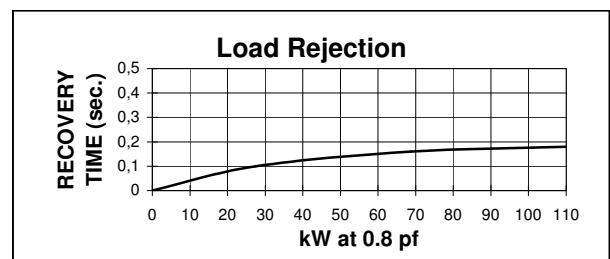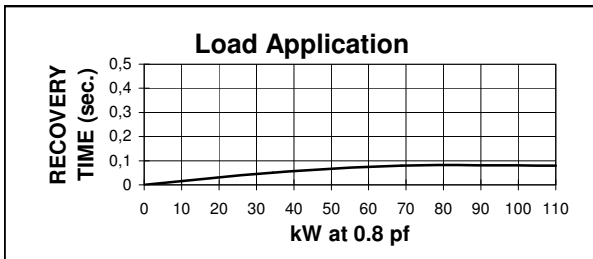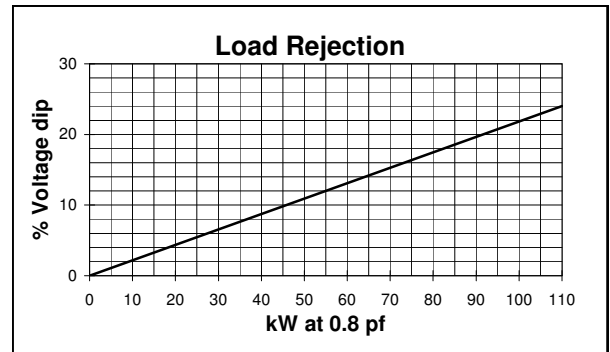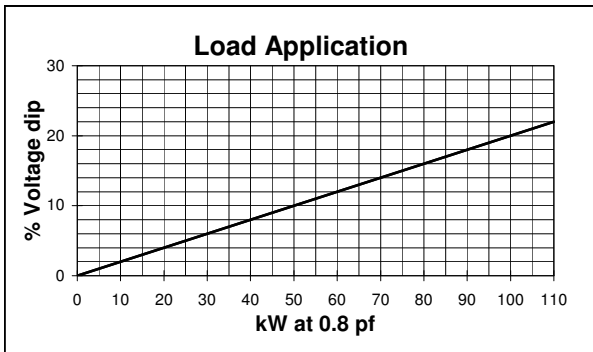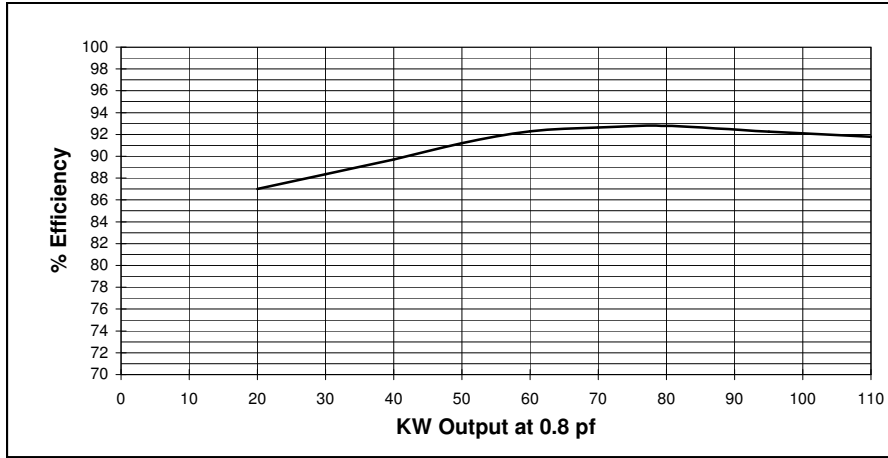


TWO BEARING MOMENTS OF INERTIA

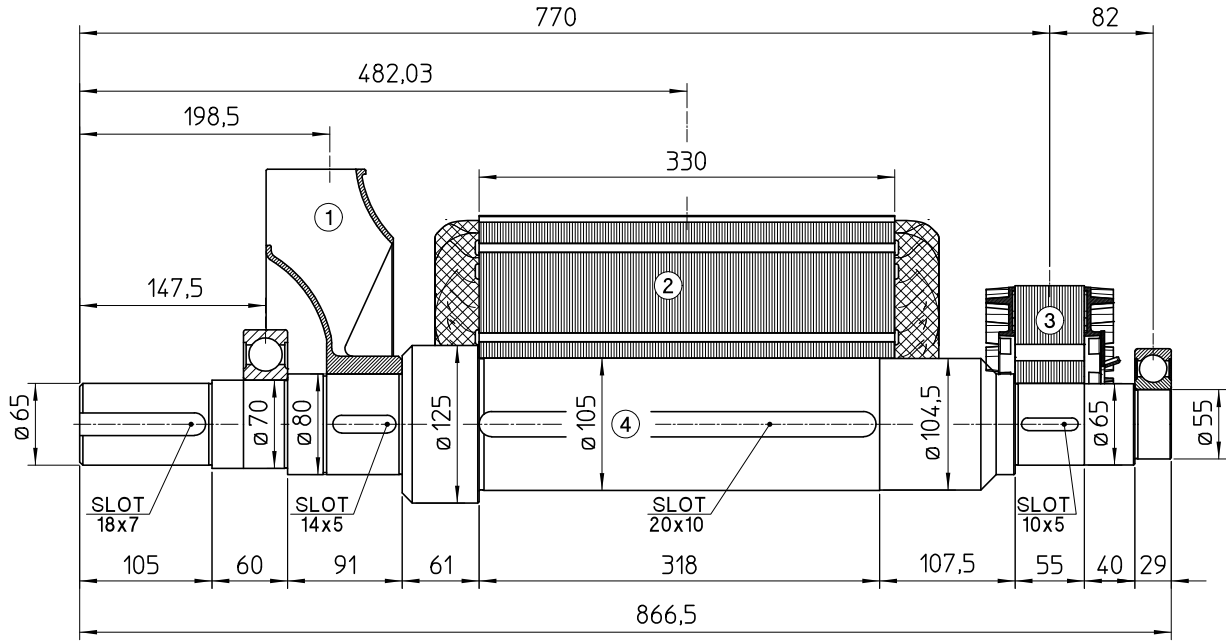


POS.	COMPONENT	WEIGHT (kg)	J (kgm <sup>2</sup> )
1	FAN	3.6	0.0621
2	MAIN ROTOR	173.6	2.6474
3	EX. ROTOR	14.5	0.0874
4	SHAFT	44	0.0547
TOTAL		235.7	2.8516

TWO BEARING DIMENSIONS

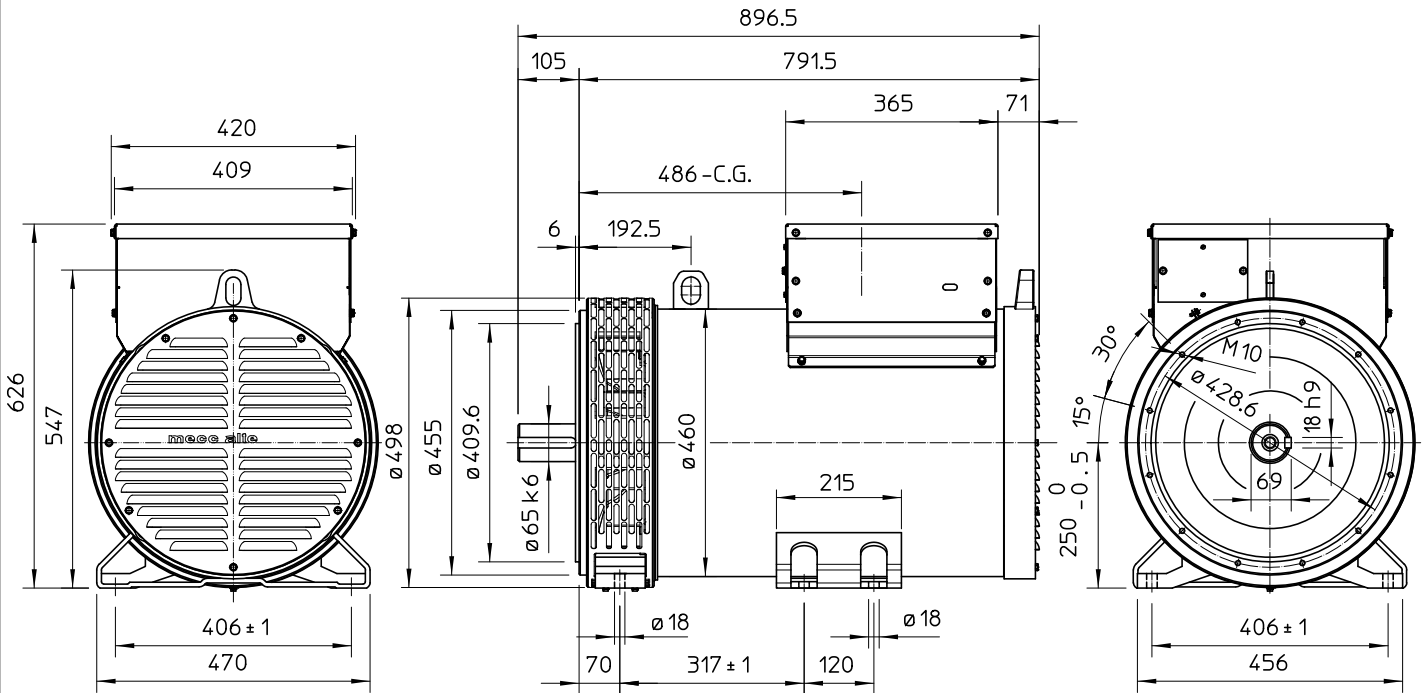

C.G.= GRAVITY CENTER


### SINGLE BEARING MOMENTS OF INERTIA

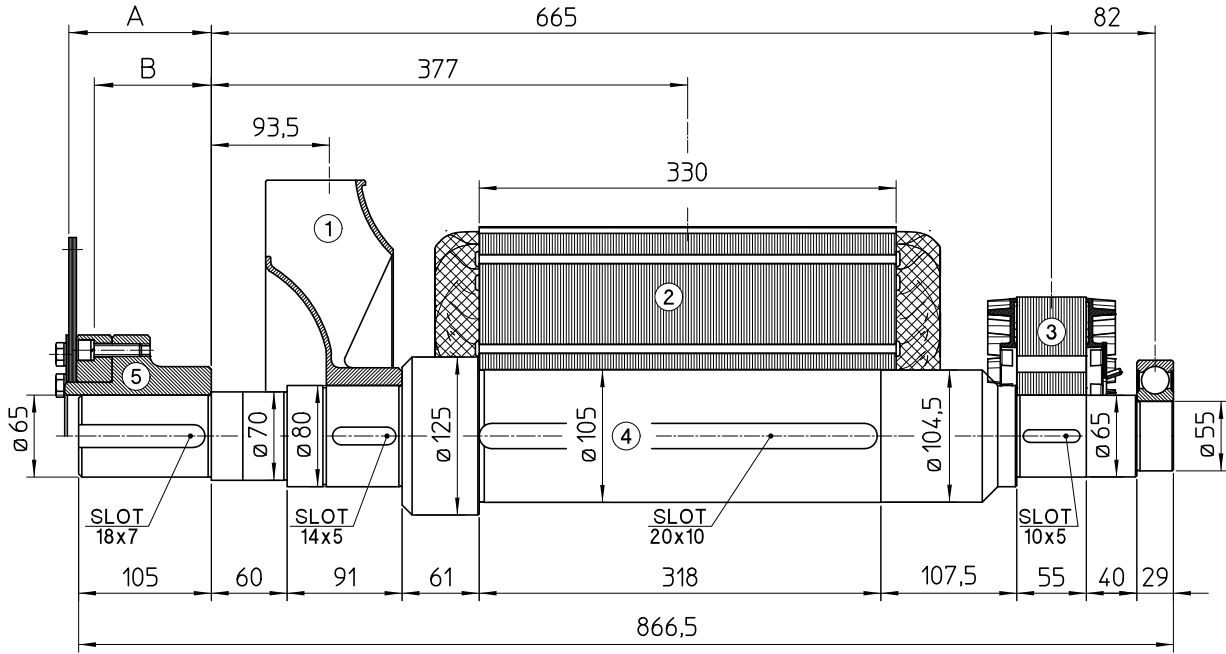

POS.	COMPONENT	WEIGHT (kg)	J (kgm <sup>2</sup> )
1	FAN	3.6	0.0621
2	MAIN ROTOR	173.6	2.6474
3	EX. ROTOR	14.5	0.0874
4	SHAFT	44	0.0547
TOTAL		235.7	2.8348

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm <sup>2</sup> )
5	SHAFTS COUPLING FLEX PLATE	10	112.8	77.2	13.5	0.0770
		11 1/2	98.4	71.5	12.4	0.0956
		14	84.4	68.6	14.8	0.2360

### SINGLE BEARING DIMENSIONS

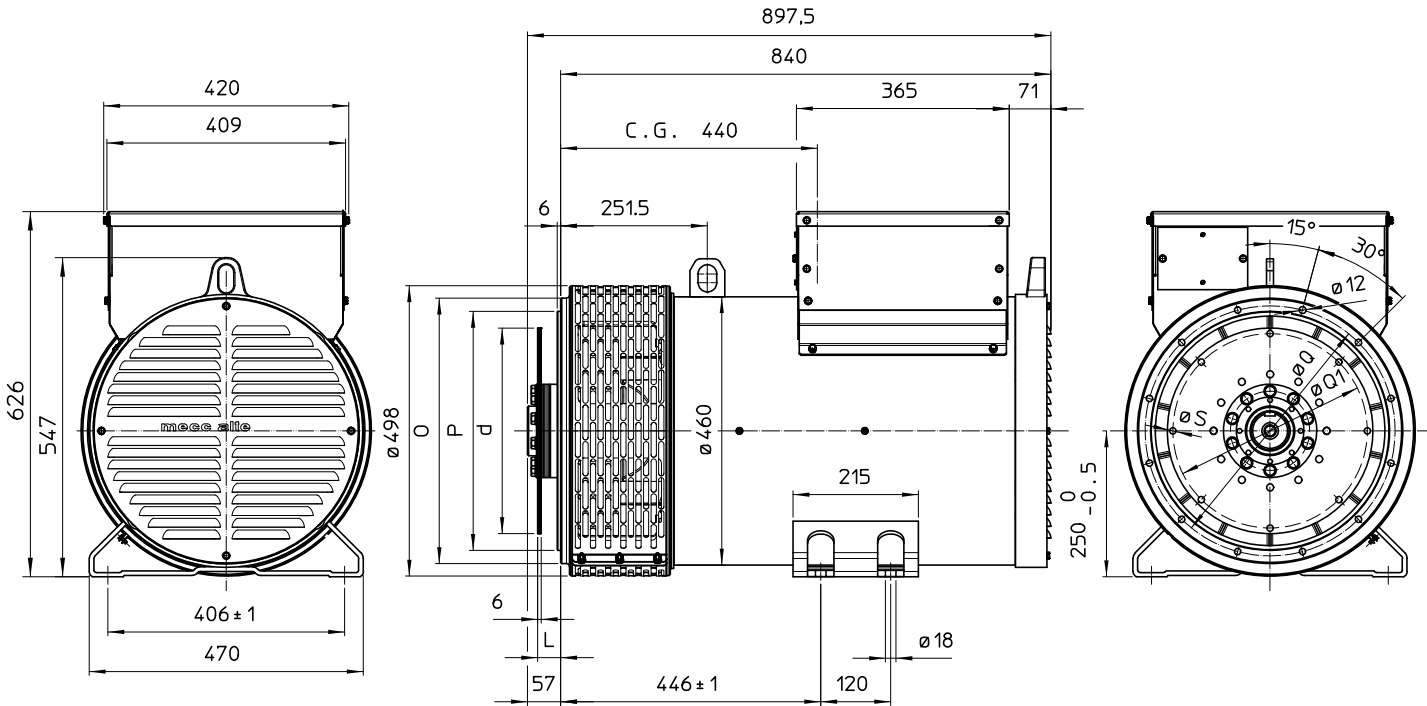

SAE N°	FLANGE		
	O	P	Q
3	451	409.6	428.6
2	489	447.7	466.7
1	552	511.2	530.2

SAE N°	DISC COUPLING			
	L	d	Q1	S
10	53.8	314.32	295.27	11
11 1/2	39.6	352.42	333.37	11
14	25.4	466.72	438.15	14

C.G.= GRAVITY CENTER